


## Polyethylene

WWW.ARPLANKSALES.COM.

## **Static Compression Strength Curve**

for 1.5 pcf (24 g/l) Foam Molded from ARPAK® Expanded Polyethylene (EPE) Beads

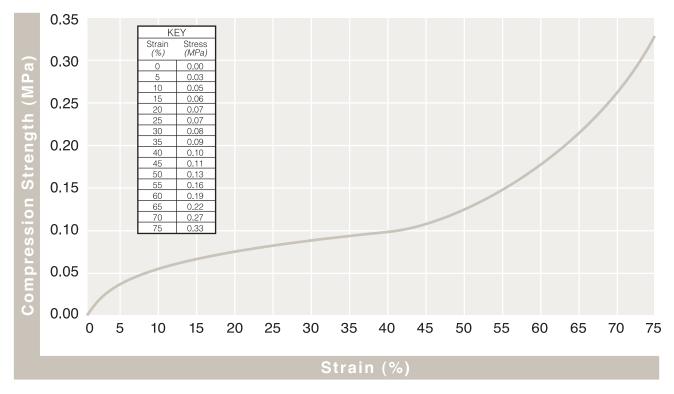

Note: 24 g/l = 1.5 pcf = 37 X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)  $1 \text{ MPa} = 1 \text{ N/mm}^2 = 145.04 \text{ psi (Units of pressure/stress)}$ Test Speed at 12.5 mm/minute (per ASTM-D3575)

ARPAK® is a registered trademark of JSP Licenses LLC. PUBLICATION JSP-CS-24gl-EPE-2006/06





