


Static Compressive Creep for 60 g/l Foam Molded from ARPRO[®] Expanded Polypropylene (EPP)

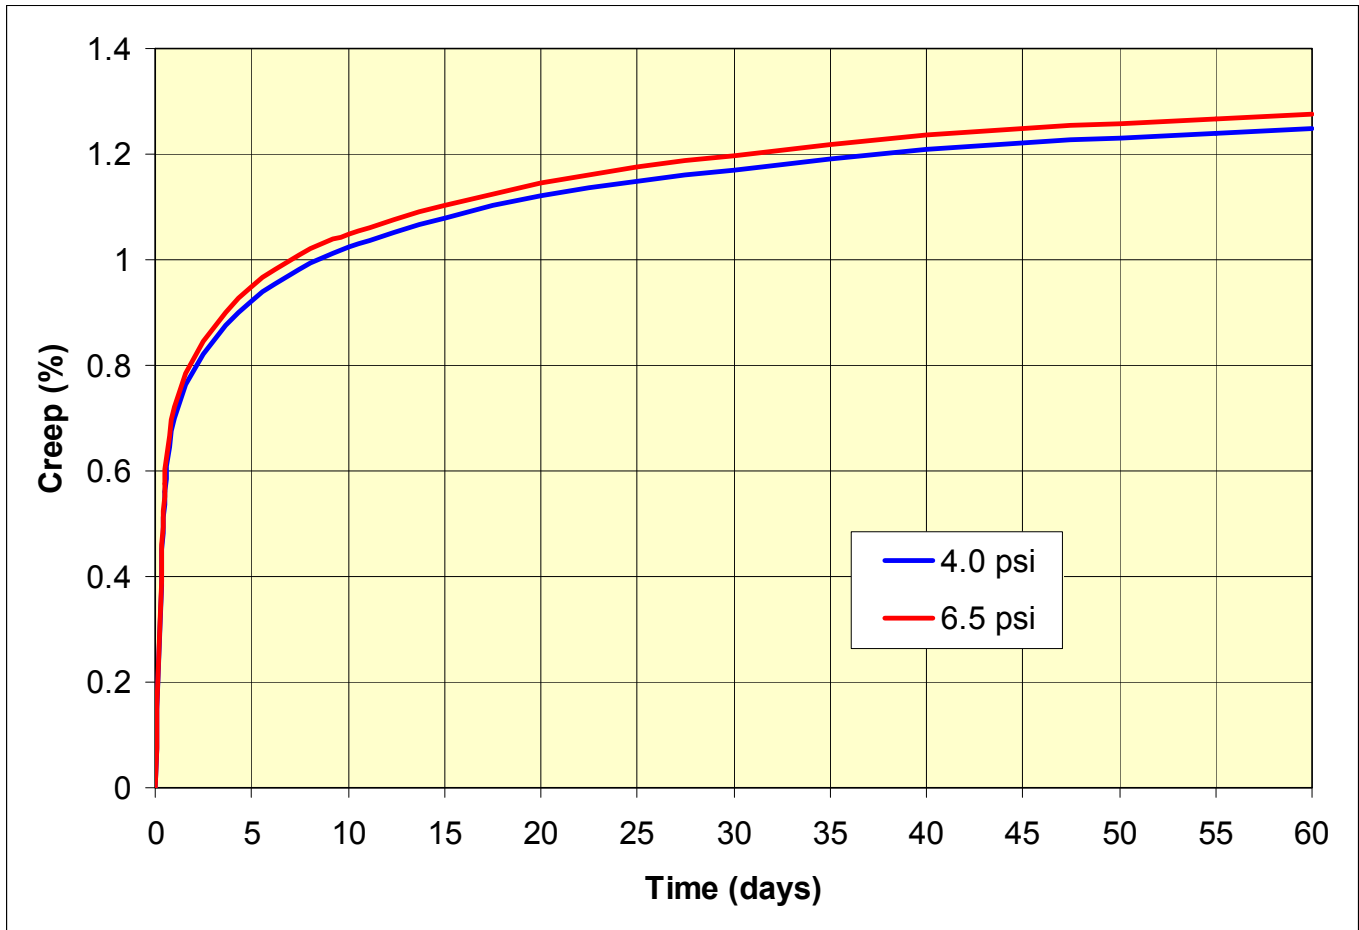

Note: 60 g/l = 3.75 pcf = 15X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)
Tested at 4.5 psi & 6.0 psi
Tested at Ambient Conditions: 73°F ±5°F (23°C ±3°C)
Tested per ASTM D3575 (ISO 7616)