




Static Compressive Strength Curve for 60 g/l Foam Molded from ARPRO® Expanded Polypropylene Beads

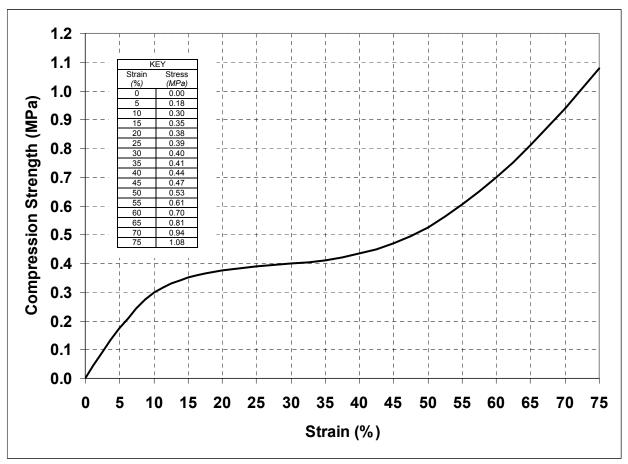

Note: 60 g/l = 3.75 pcf = 15 X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio) 1 MPa = 1 N/mm² = 145.04 psi (Units of pressure/stress) Test Speed at 12.5 mm/minute (per ASTM-D3575)

 $\mathsf{ARPRO}^{\otimes} \text{ is a registered trademark of JSP International.} \qquad \mathsf{PUBLICATION} \text{ JSPI-EPP-CS60-2003/05}$

