



Cushioning Performance Curve for 24 g/l (1.5 pcf) ARPAK® Expanded Polyethylene (EPE) Foam 42 inch Drop, 1st Impact/Drop - 2" Thickness

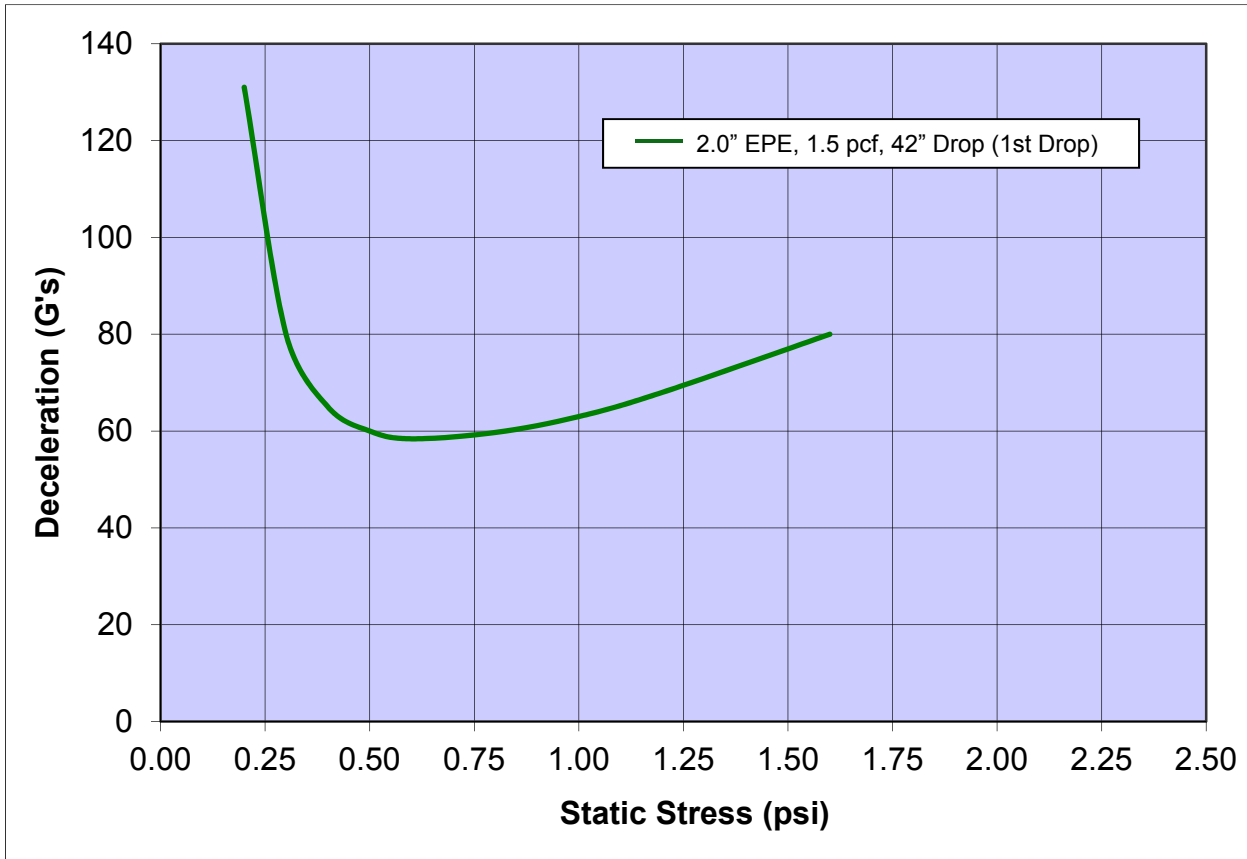


Note: 24 g/l = 1.5 pcf = 37.5X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)

Cushioning Performance Curve for 24 g/l (1.5 pcf) ARPAK® Expanded Polyethylene (EPE) Foam 12 inch Drop, 1st Impact/Drop - 1", 2" and 3" Thickness

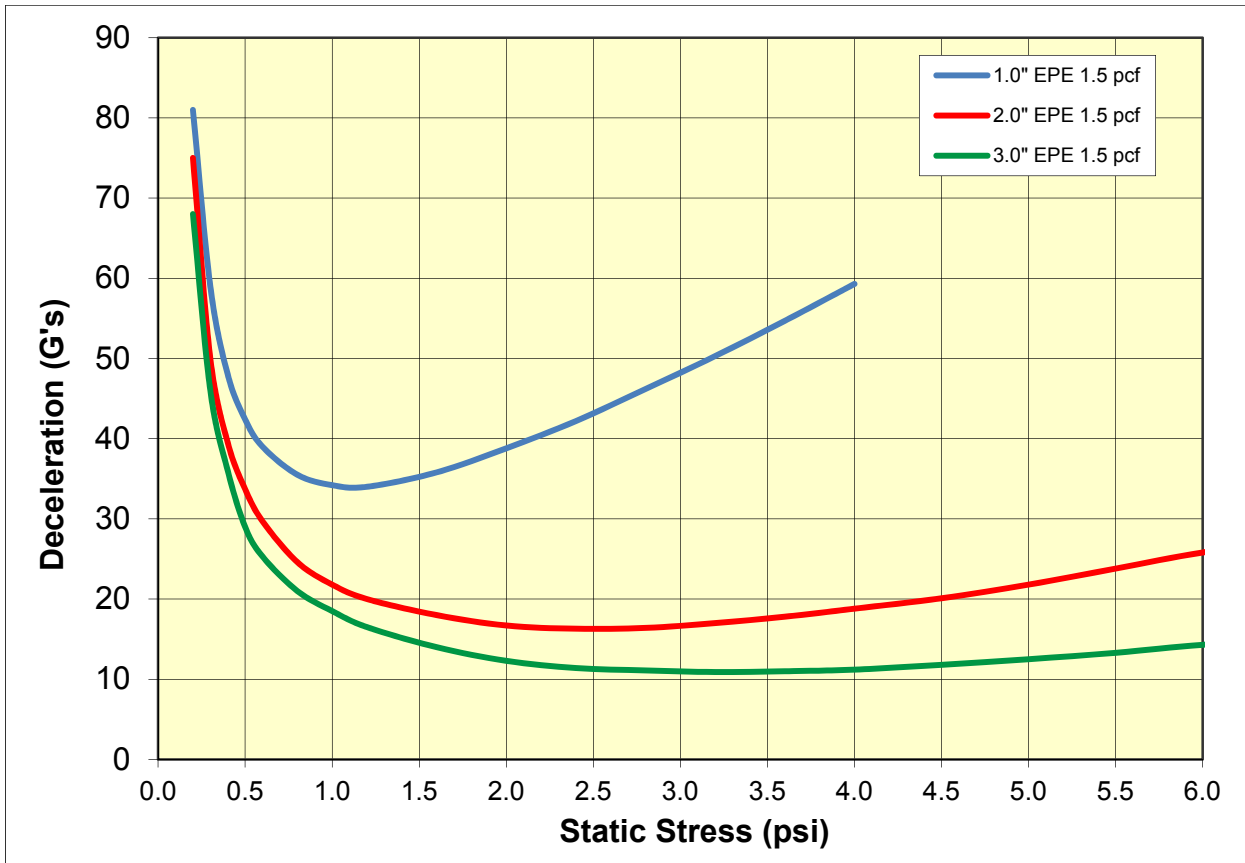

Note: 24 g/l = 1.5 pcf = 37.5X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)

Cushioning Performance Curve for 24 g/l (1.5 pcf) ARPAK® Expanded Polyethylene (EPE) Foam 42 inch Drop, 1st Impact/Drop - 1", 2" and 3" Thickness'

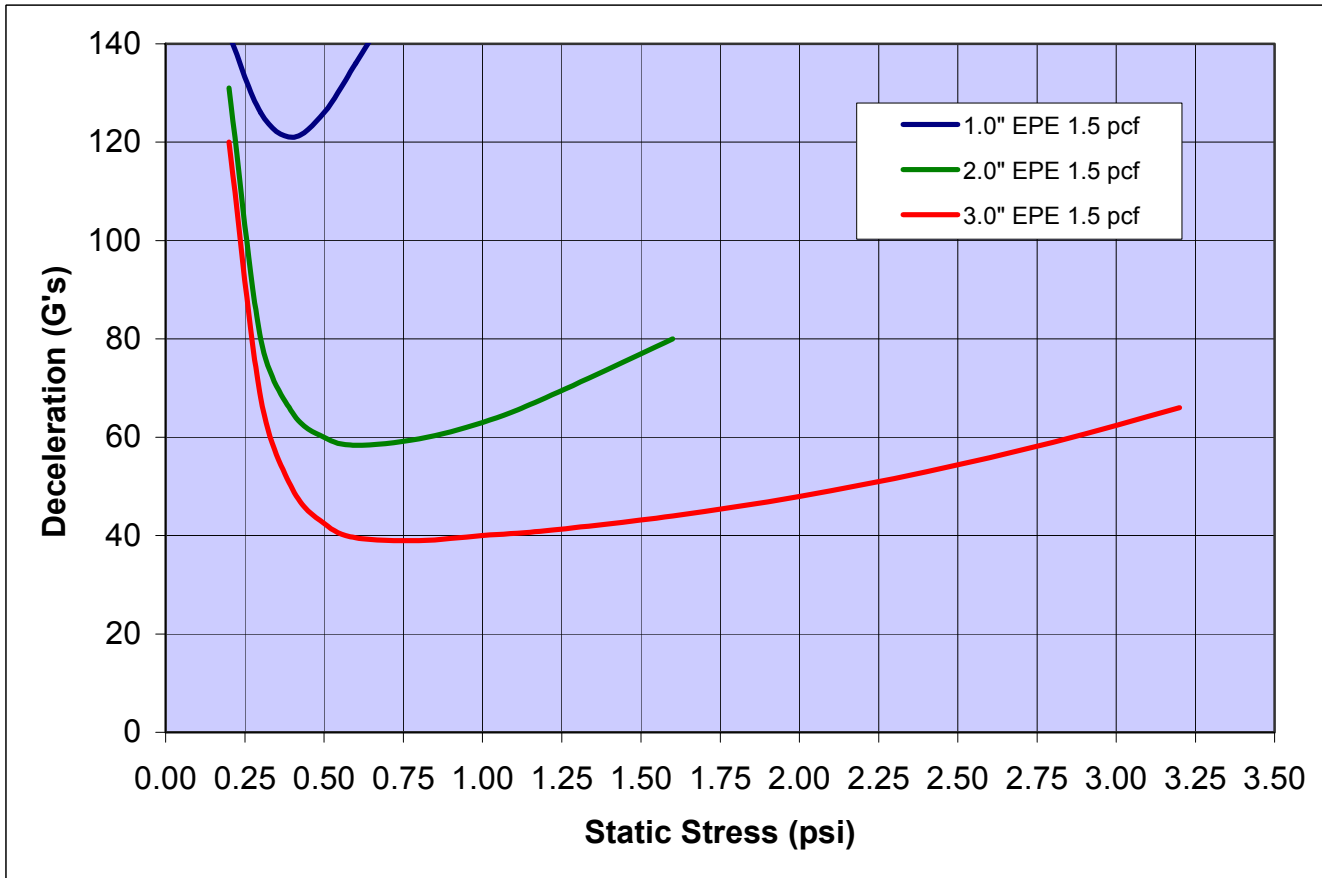

Note: 24 g/l = 1.5 pcf = 37.5X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)