



Cushioning Performance Curve for 53 g/l (3.3 pcf) ARPAK® EPE Foam 24 inch Drop, 2nd thru 5th Impact/Drop – 1”, 2” & 3” Thicknesses

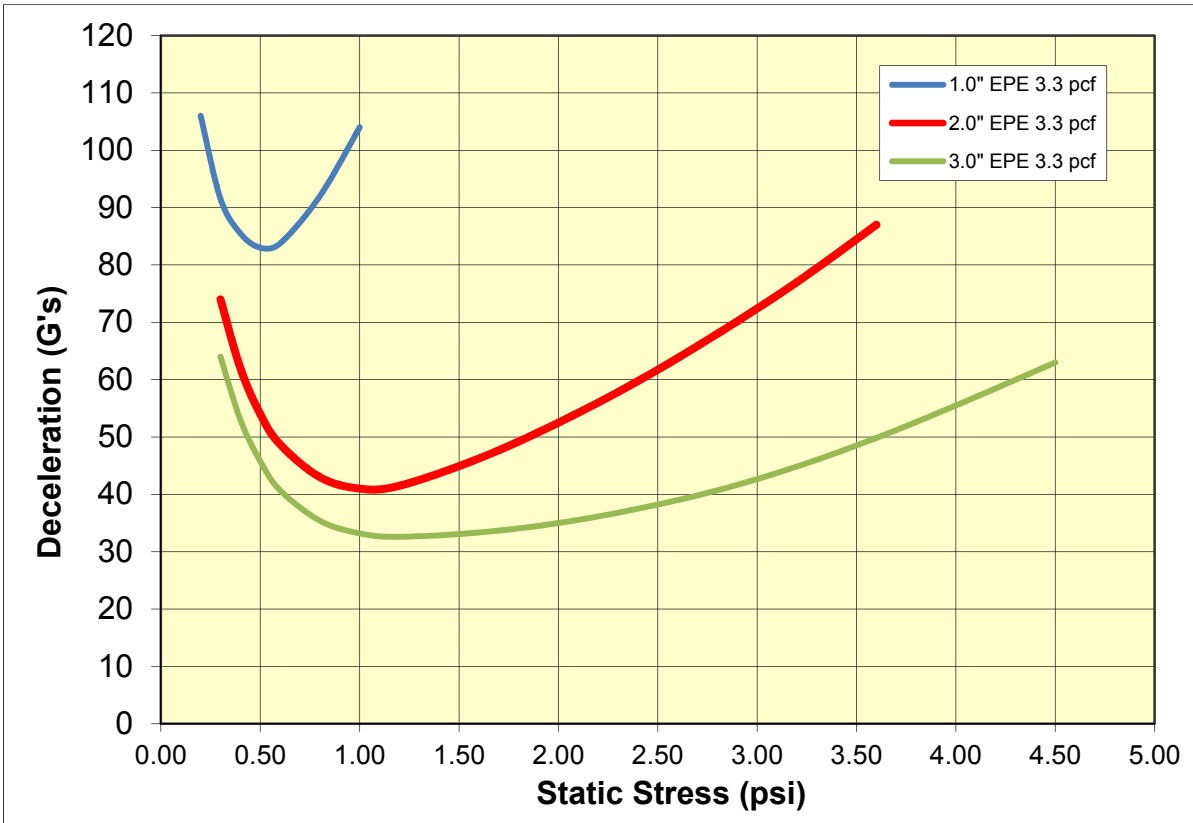


Note: 53 g/l = 3.3 pcf = 17.5X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)

Cushioning Performance Curve for 53 g/l (3.3 pcf) ARPAK[®] EPE Foam 24 inch Drop, 1st & 2nd thru 5th Impact/Drop – 1", 2" & 3" Thicknesses

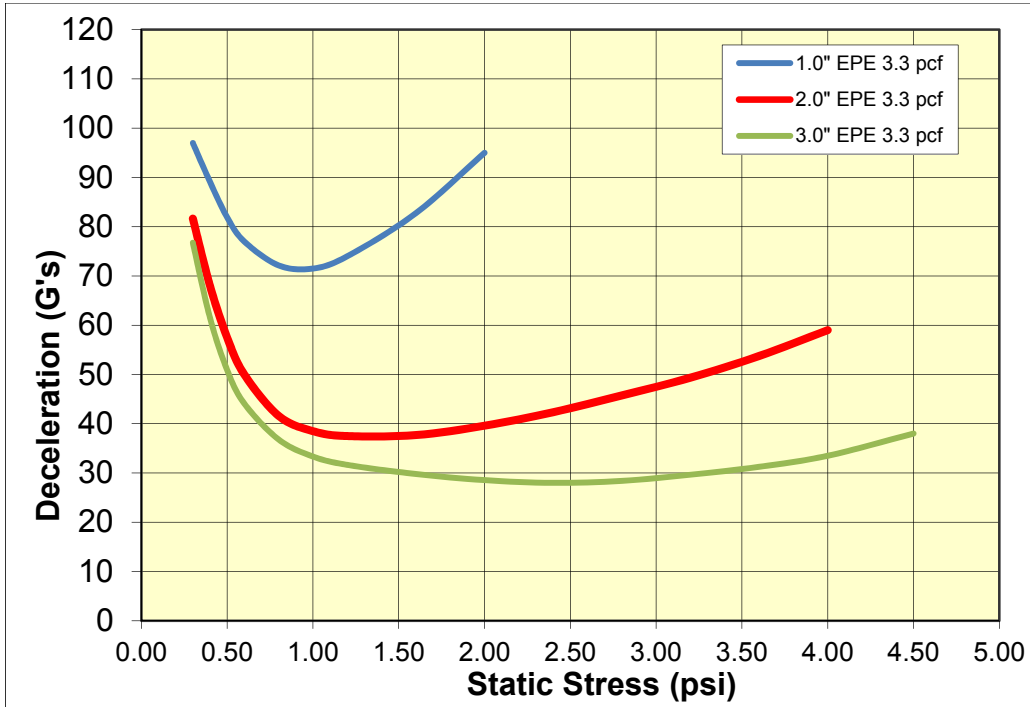

1st Drop

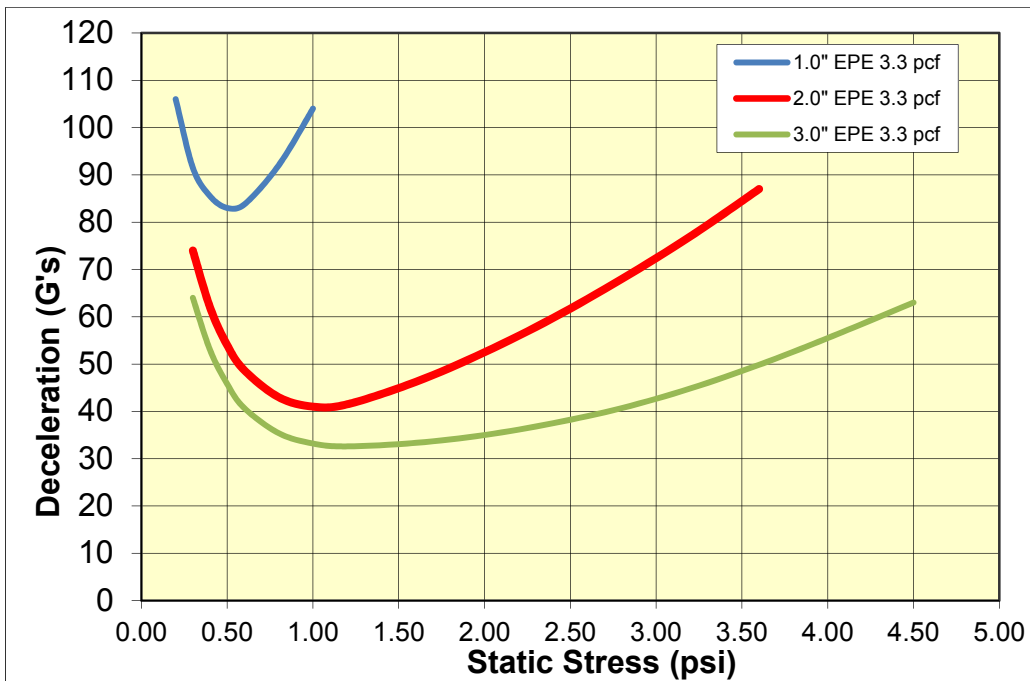

2nd thru 5th Drop

Note: 53 g/l = 3.3 pcf = 17.5X
(g/l = grams per liter;
pcf = pounds per cubic foot;
X = foam expansion ratio)