




## Cushioning Performance Curve for 74 g/l (4.6 pcf) ARPAK® Expanded Polyethylene (EPE) Foam 24 inch Drop, 1st Impact/Drop - 2" Thickness

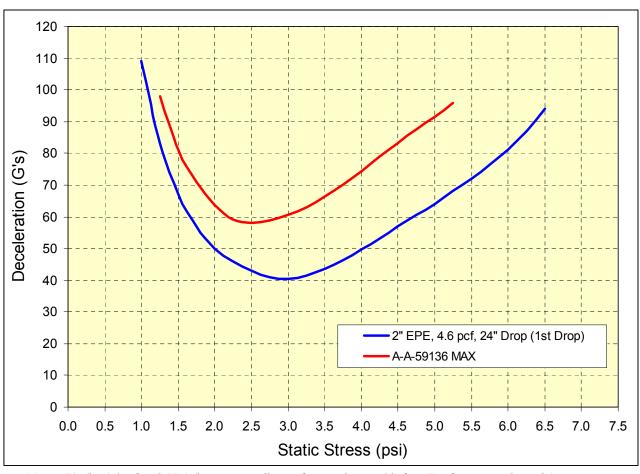


Note: 74 g/l = 4.6 pcf = 12.1X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio) Sample size = 8" x 8"

> JSP www.jsp.com





## Cushioning Performance Curve for 74 g/l (4.6 pcf) ARPAK<sup>®</sup> Expanded Polyethylene (EPE) Foam 24 inch Drop, 1<sup>st</sup> Impact/Drop - 2" & 3" Thickness

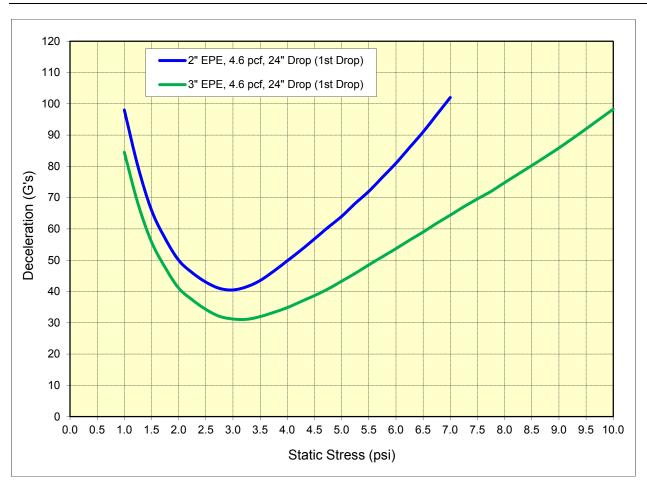

Note: 74 g/l = 4.6 pcf (g/l = grams per liter; pcf = pounds per cubic foot)

