



Cushioning Performance Curve for 30 g/l (1.9 pcf) ARPRO Expanded Polypropylene (EPP) Foam 12 inch Drop, 1st Impact/Drop - 1", 2", & 3" Thickness'

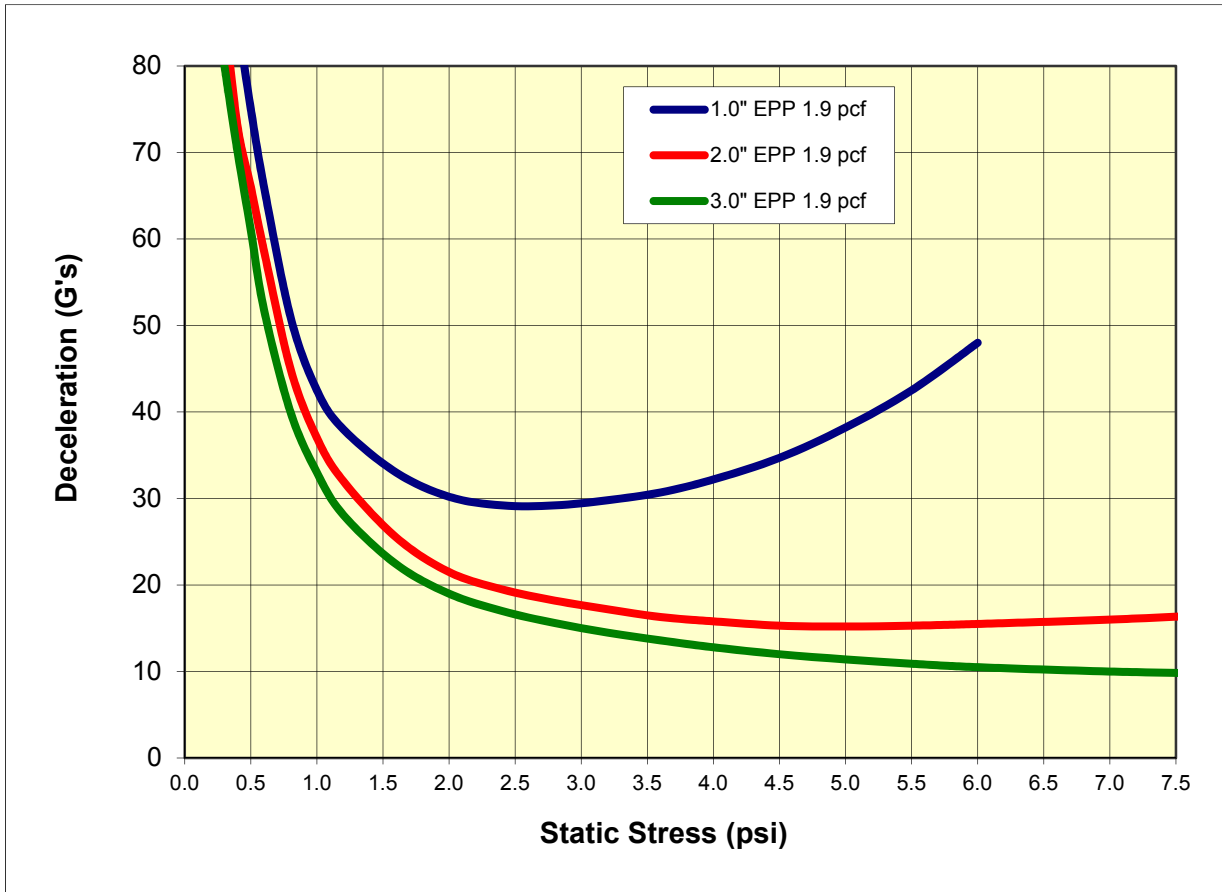


Notes: 30 g/l = 1.9 pcf = 30X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)
Tested at ambient conditions

Cushioning Performance Curve for 30 g/l (1.9 pcf) ARPRO Expanded Polypropylene (EPP) Foam 18 inch Drop, 1st Impact/Drop - 1", 2", & 3" Thickness'

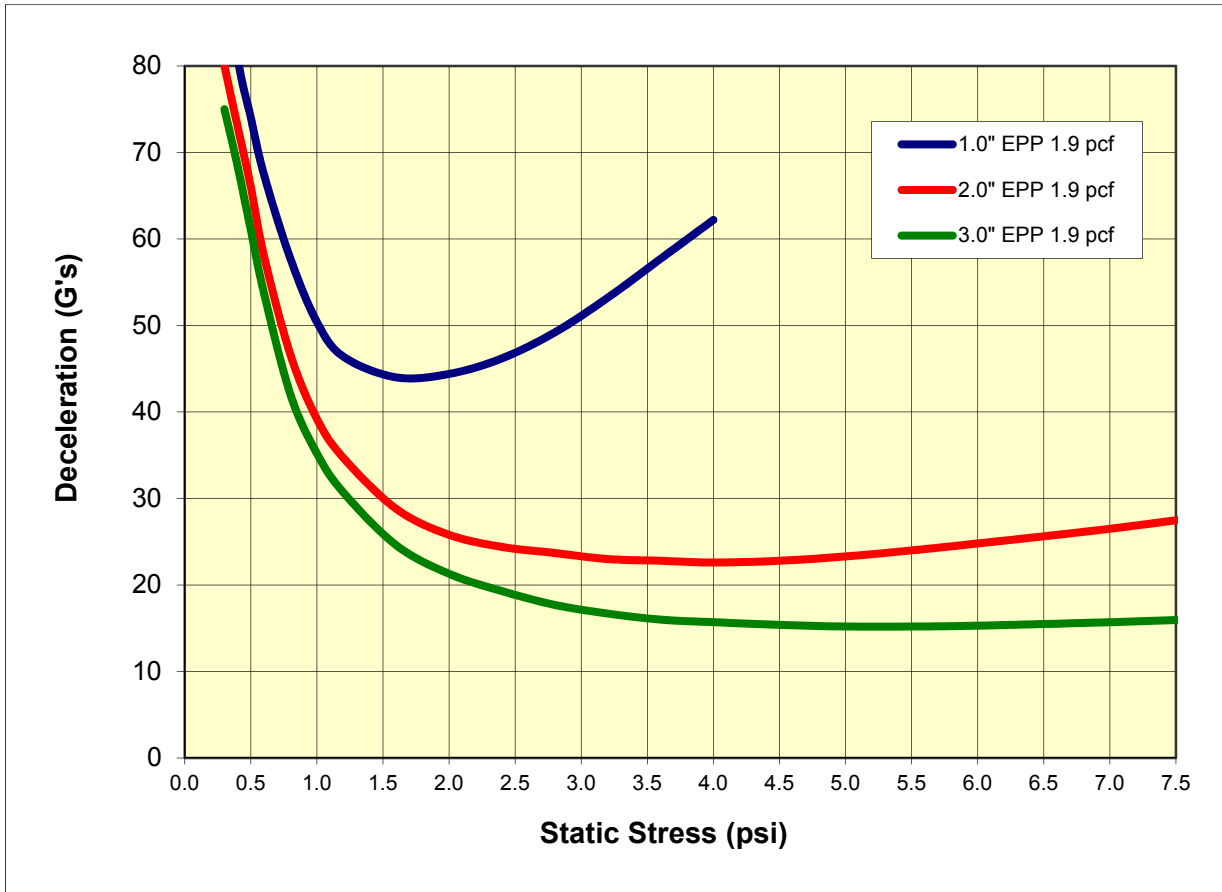


Notes: 30 g/l = 1.9 pcf = 30X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)
Tested at ambient conditions

Cushioning Performance Curve for 30 g/l (1.9 pcf) ARPRO Expanded Polypropylene (EPP) Foam 30 inch Drop, 1st Impact/Drop - 1", 2", & 3" Thickness'

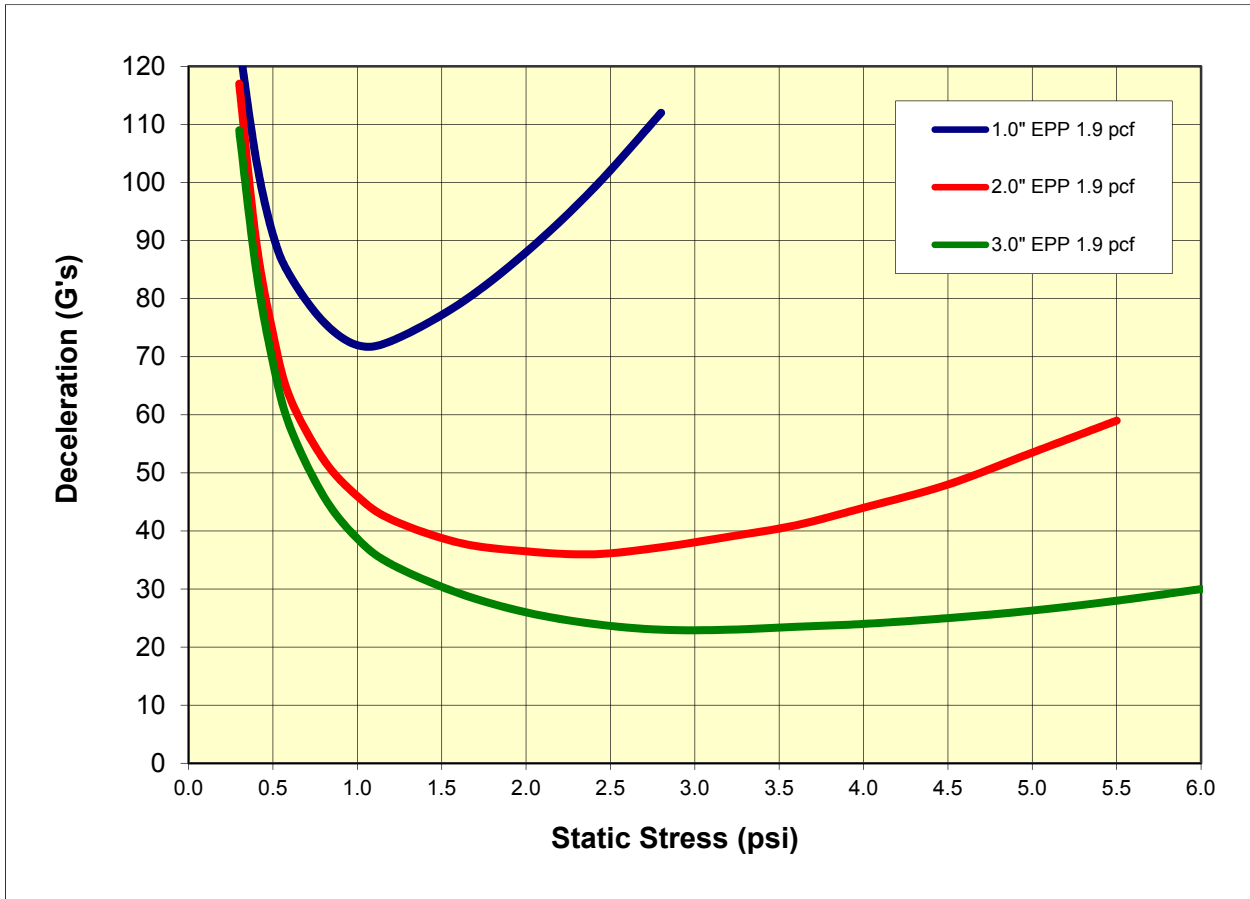


Notes: 30 g/l = 1.9 pcf = 30X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)
Tested at ambient conditions

Cushioning Performance Curve for 30 g/l (1.9 pcf) ARPRO Expanded Polypropylene (EPP) Foam 36 inch Drop, 1st Impact/Drop - 1", 2", 3" & 4" Thicknesses

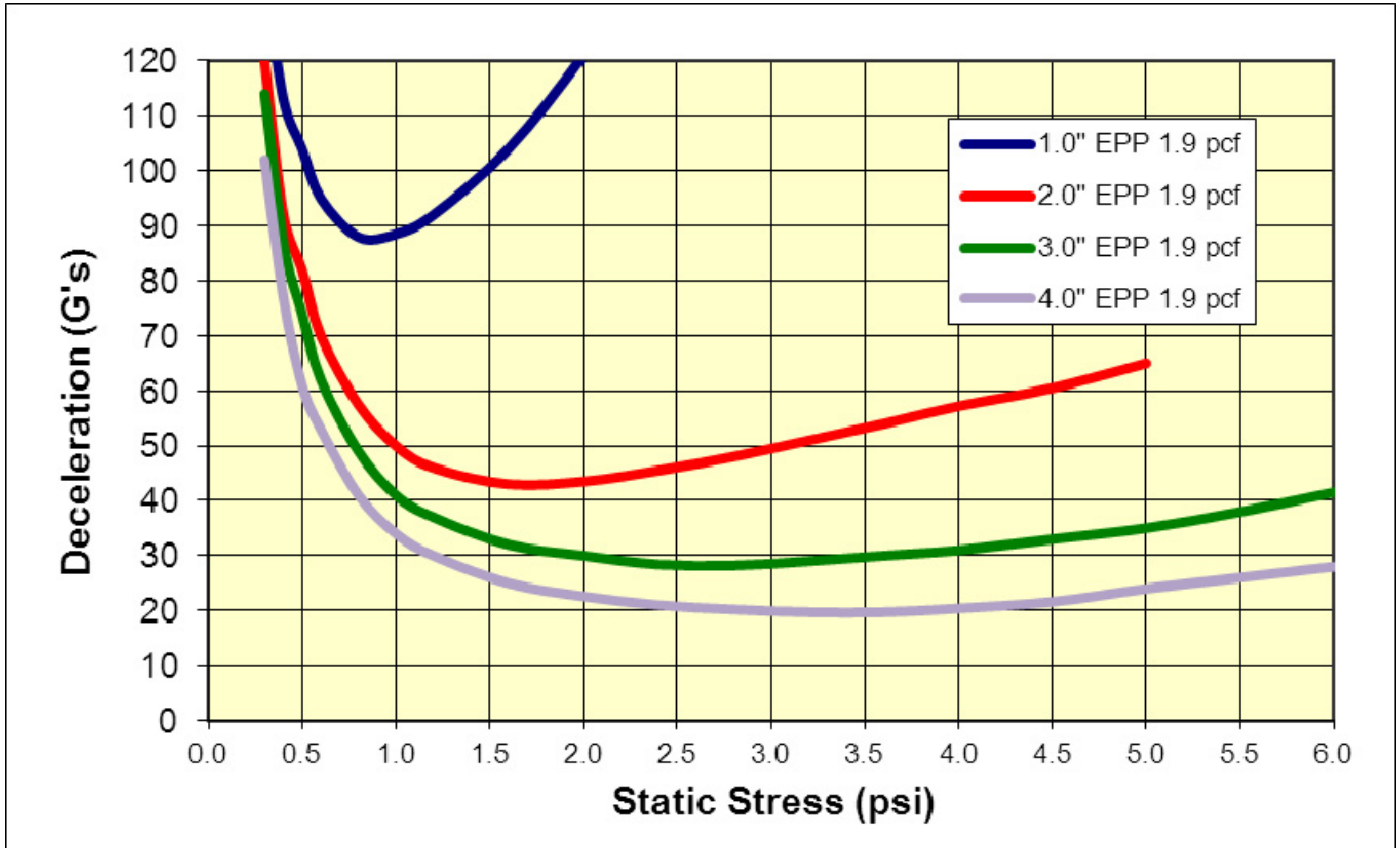

Note: 30 g/l = 1.9 pcf = 30X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)

Cushioning Performance Curve for 30 g/l (1.9 pcf) ARPRO® Expanded Polypropylene (EPP) Foam 42 inch Drop, 1st Impact/Drop - 2" Thickness

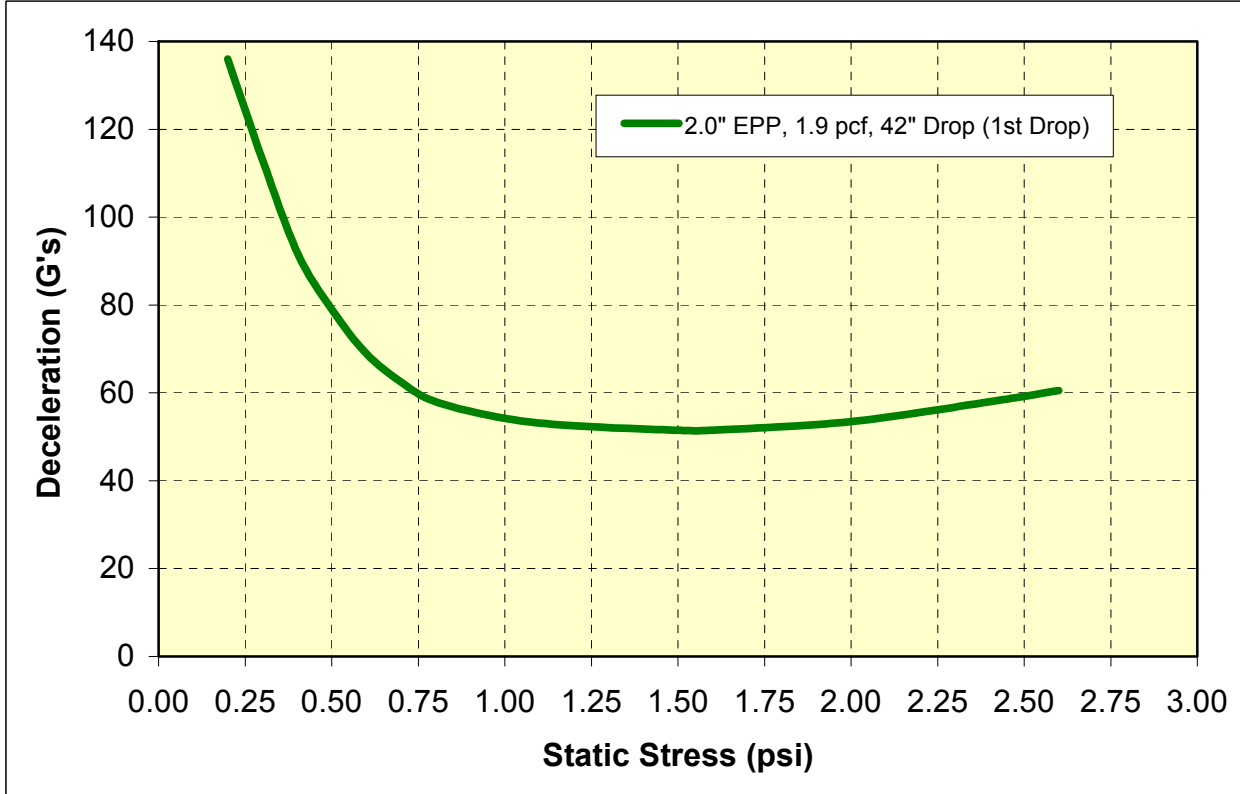

Note: 30 g/l = 1.9 pcf = 30X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)
Sample size = 8" x 8"