



Cushioning Performance Curve

60 g/l (3.7 pcf) ARPRO Expanded Polypropylene (EPP) Foam

24 inch Drop, 1st Impact & 2nd thru 5th Impact; 3" Thickness

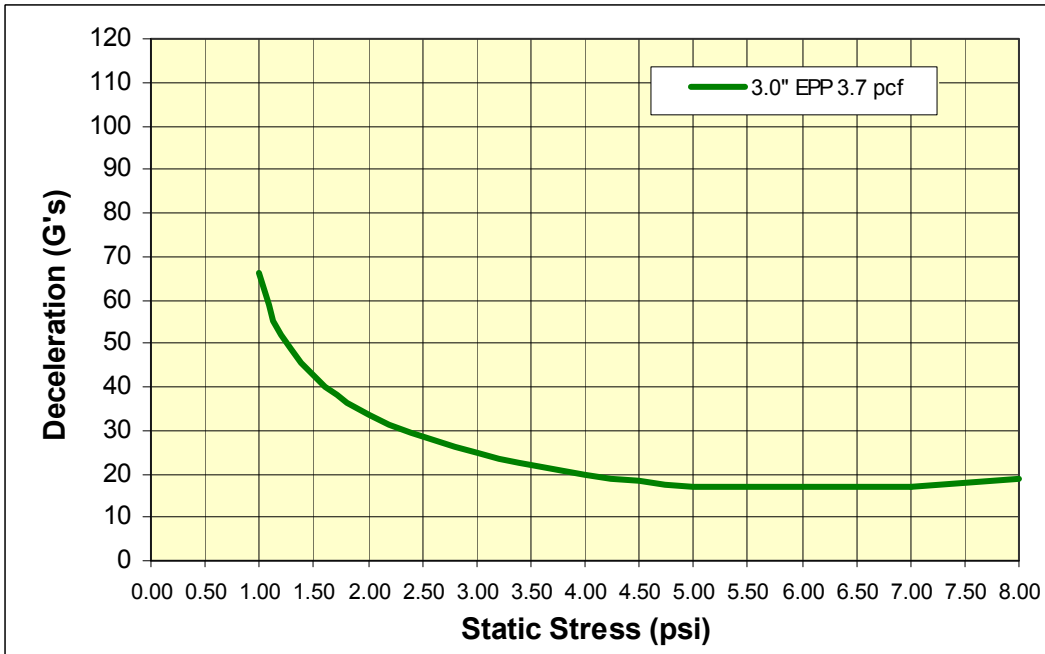

1st Impact

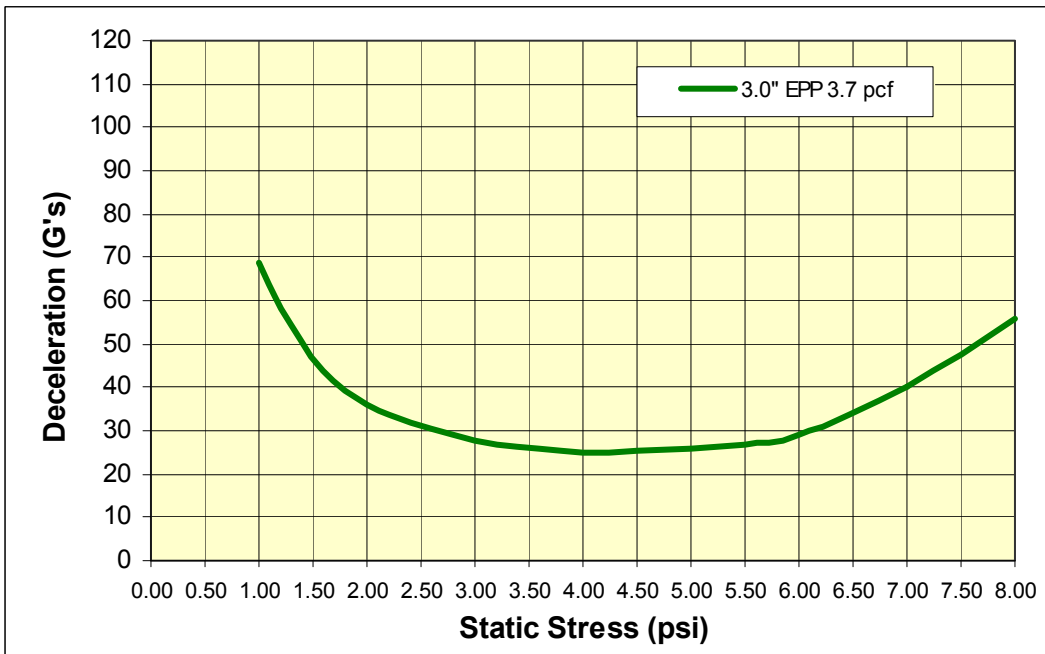


2nd thru 5th
Impact

Note: 60 g/l = 3.7 pcf = 15X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)
Sample size = 12" x 12"


Cushioning Performance Curve

60 g/l (3.7 pcf) ARPRO Expanded Polypropylene (EPP) Foam

24 inch Drop, 1st Impact & 2nd thru 5th Impact; 1", 2", & 3" Thicknesses

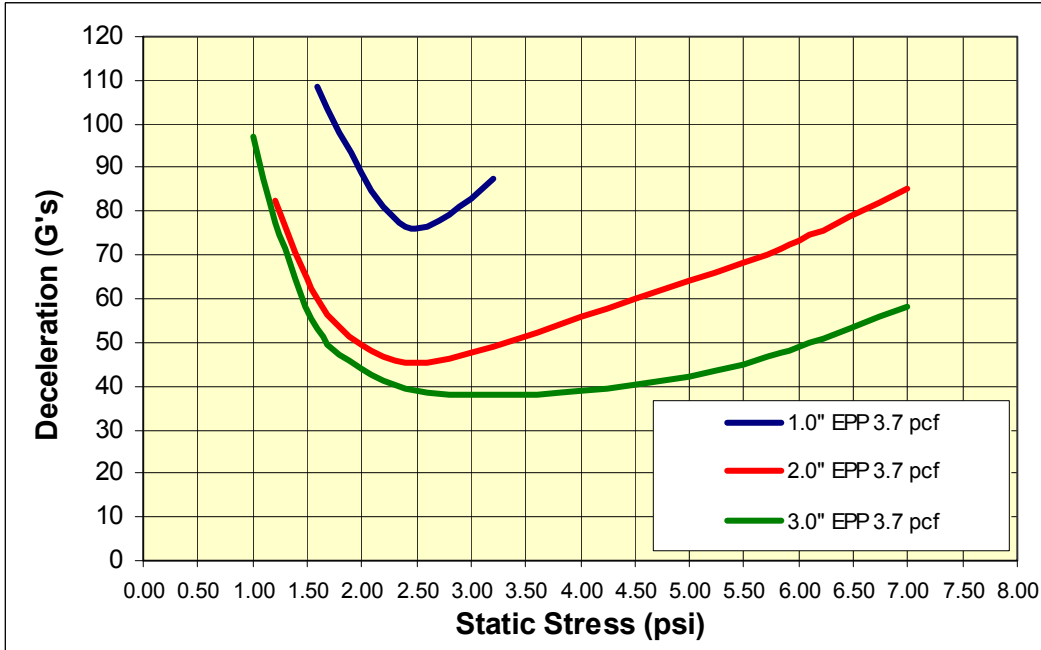


1st Impact

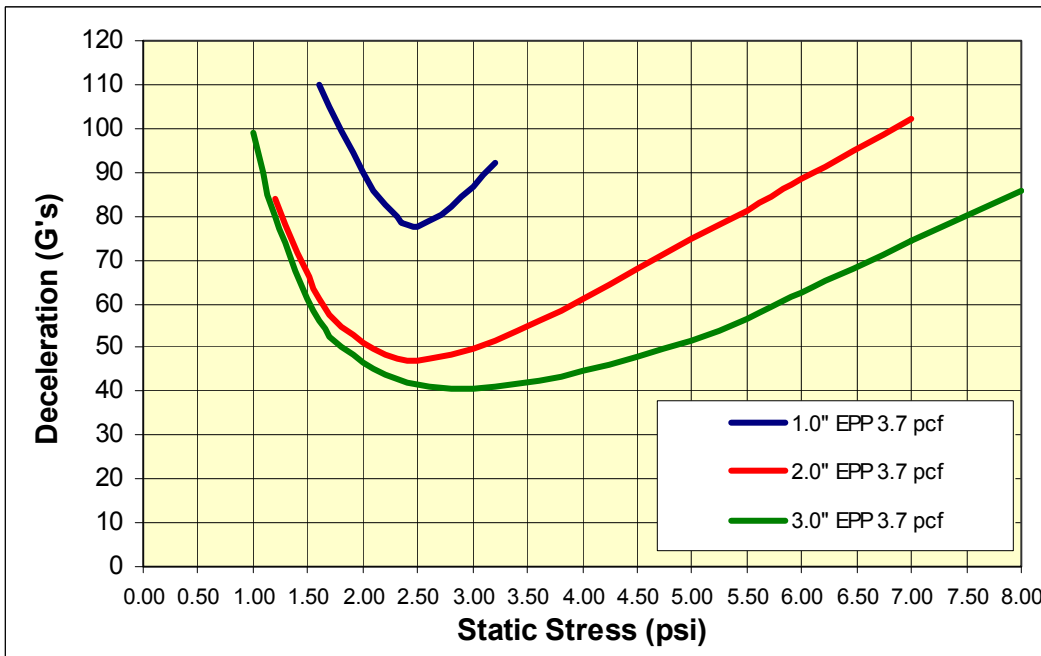

2nd thru 5th
Impact

Note: 60 g/l = 3.7 pcf = 15X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)
Sample size = 6" x 6"

Cushioning Performance Curve for 60 g/l (3.7 pcf) ARPRO Expanded Polypropylene (EPP) Foam 24 inch Drop, 2nd thru 5th Impact/Drop - 1", 2", & 3" Thickness'

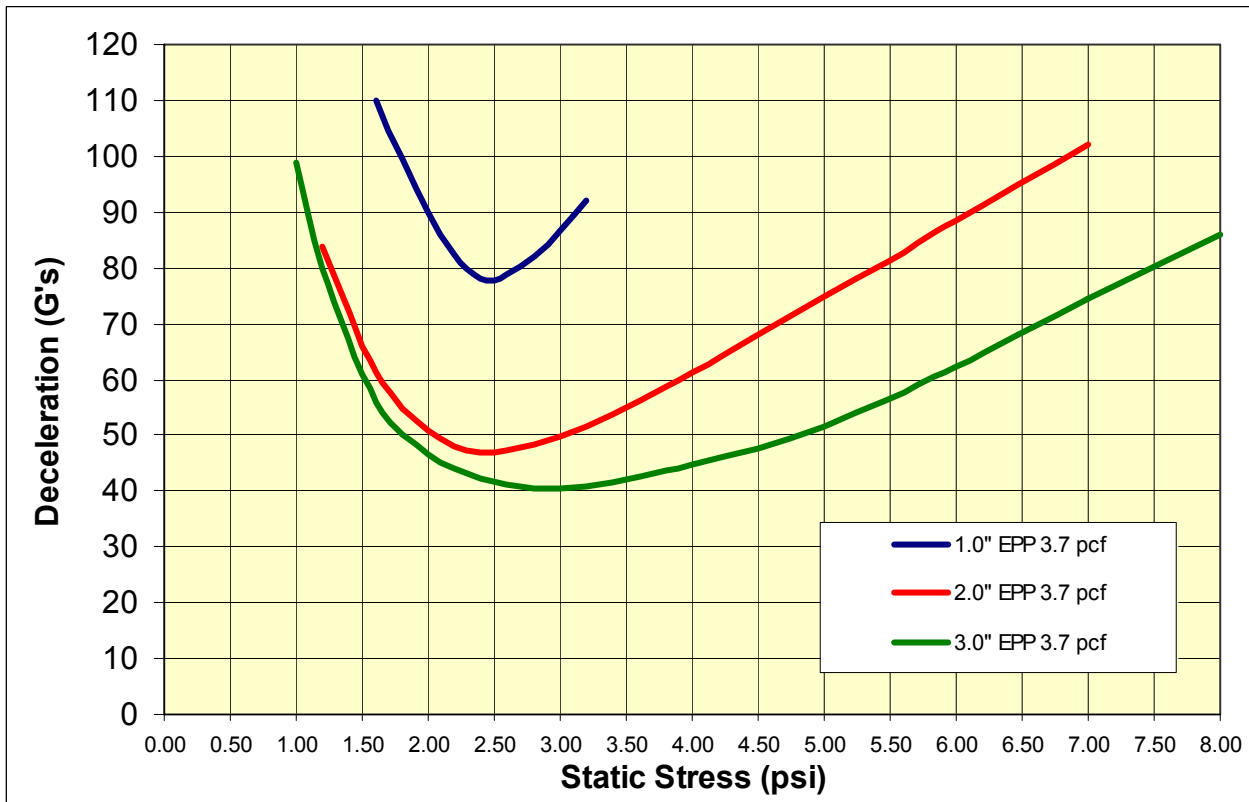


Note: 60 g/l = 3.7 pcf = 15X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)
Sample size = 6" x 6"


Cushioning Performance Curve

60 g/l (3.7 pcf) ARPRO Expanded Polypropylene (EPP) Foam

30 inch Drop, 1st Impact & 2nd thru 5th Impact; 3" Thickness

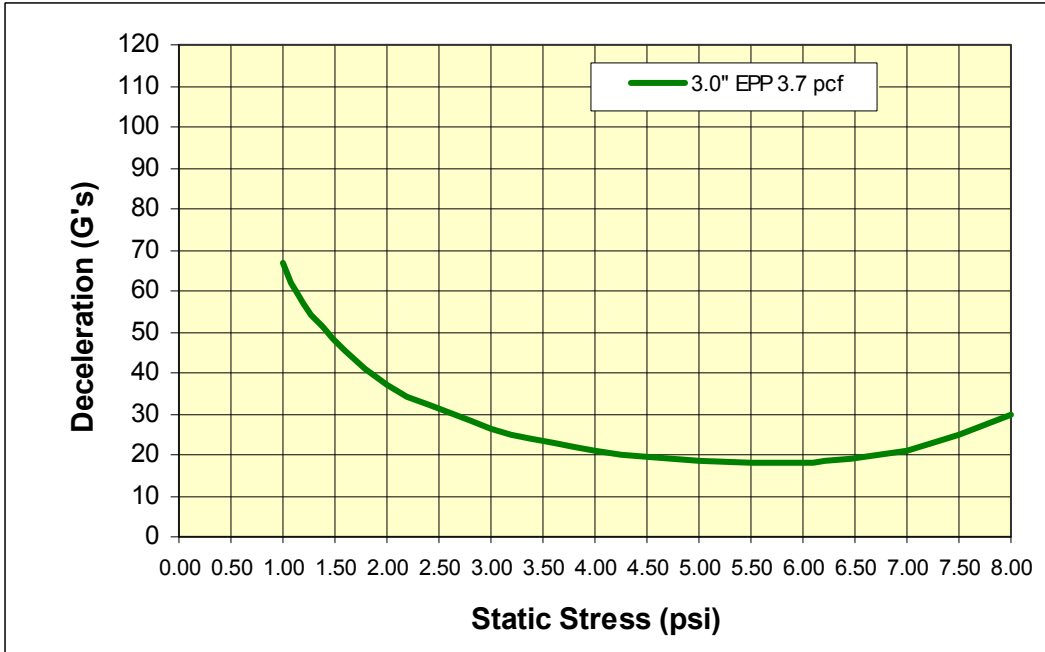

1st Impact

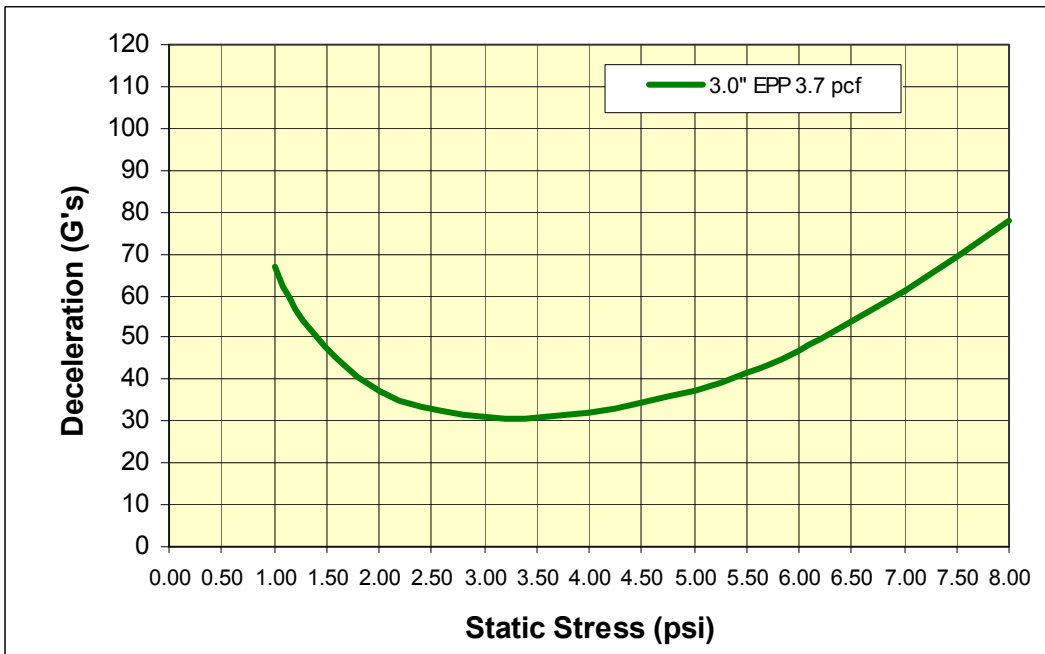

2nd thru 5th Impact

Note: 60 g/l = 3.7 pcf = 15X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)
 Sample size = 12" x 12"