


Static Compressive Creep for 74 g/l (4.6 pcf) Molded from ARPAK® Expanded Polyethylene (EPE)

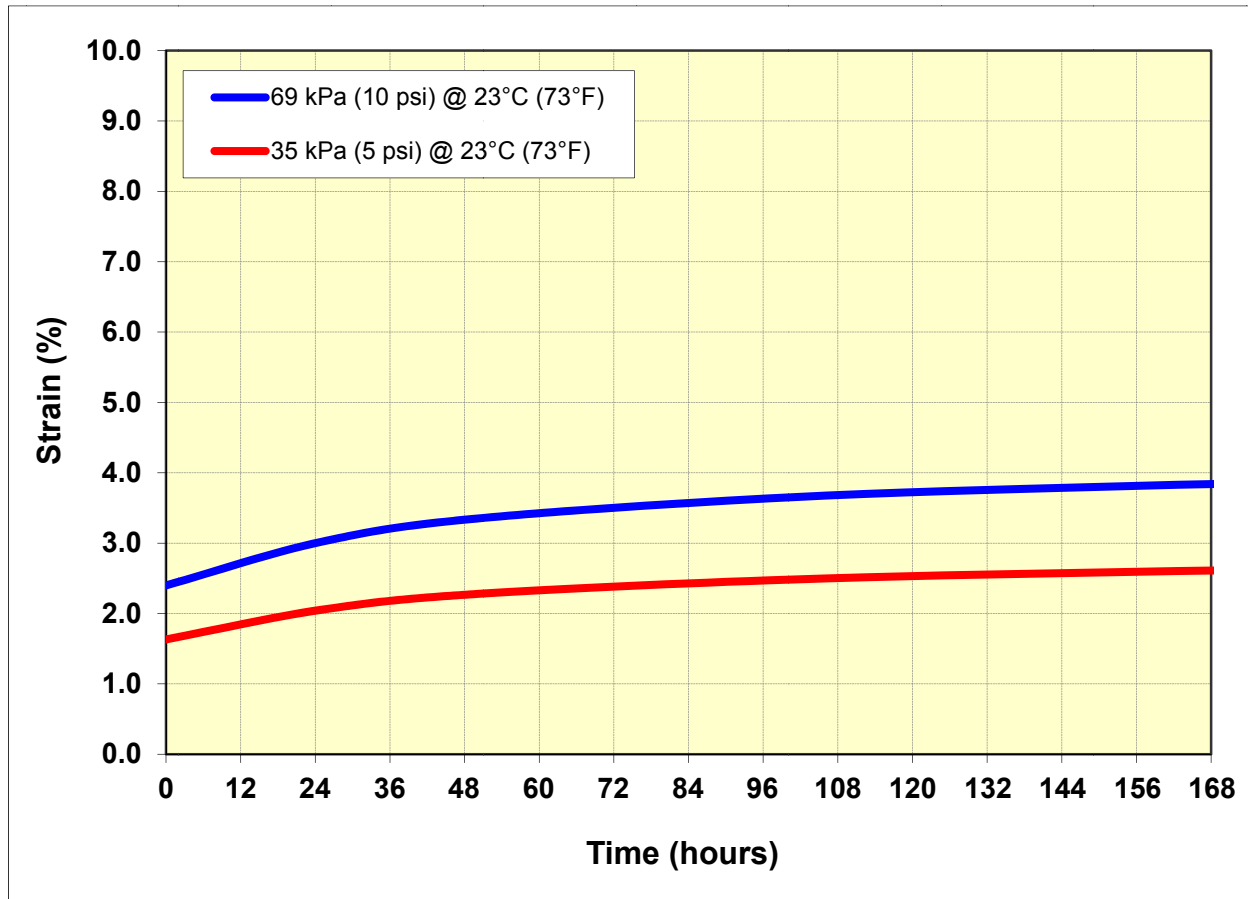

Note: 74 g/l = 4.6 pcf = 12.5X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)

Tested at 69 kPa & 35 kPa (10 psi & 5 psi)

Tested at Ambient Conditions: 23°C ±2°C (73°F ±4°F)

Tested per ASTM D3575 (ISO 7616)