





Cushioning Performance Curve for 37 g/l (2.3 pcf) ARPAK[®] Expanded Polyethylene (EPE) Foam 18 inch Drop, 2nd thru 5th Impact/Drop - 2", 3", and 4" Thickness



Note: 37 g/l = 2.3 pcf (g/l = grams per liter; pcf = pounds per cubic foot)

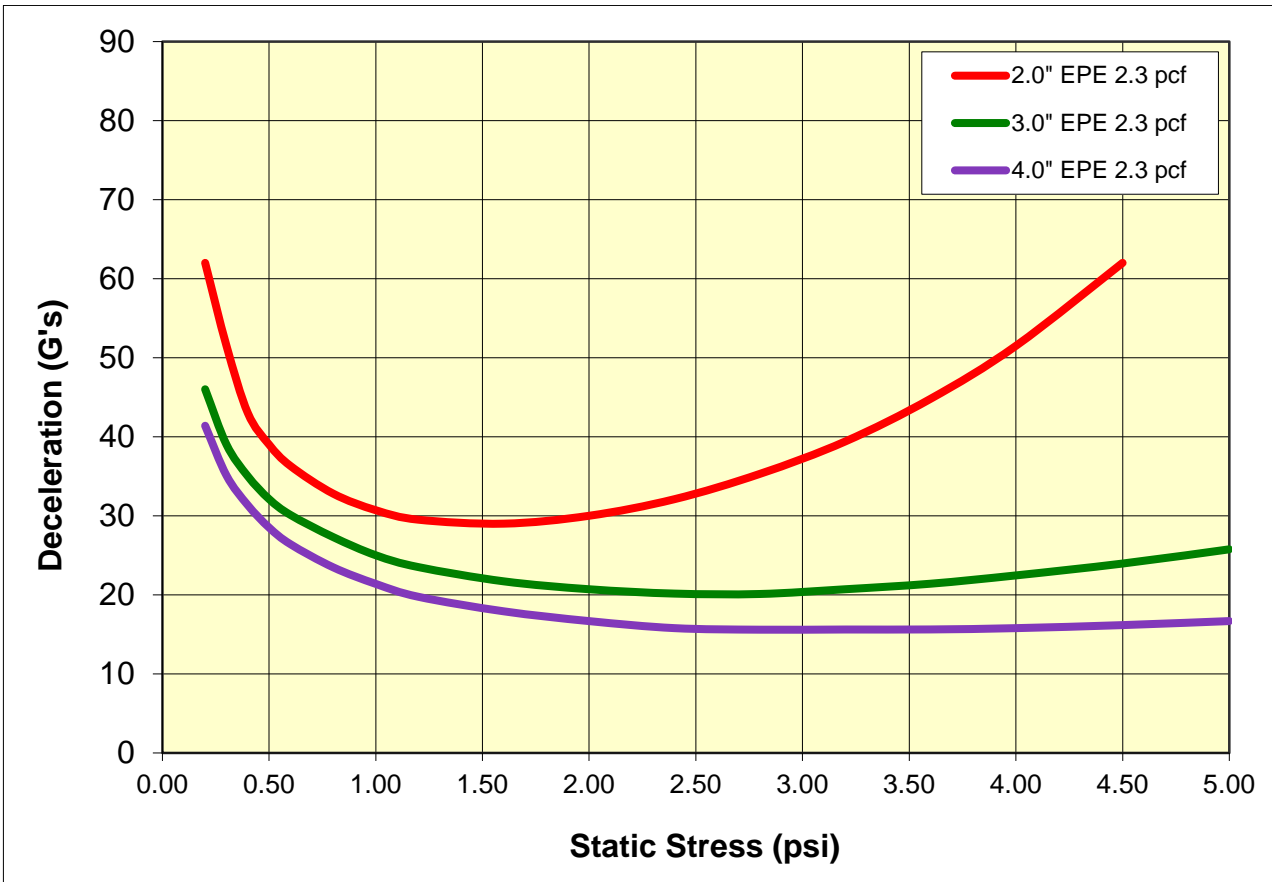


Cushioning Performance Curve for 37 g/l (2.3 pcf) ARPAK® EPE Foam 24 inch Drop, 2nd thru 5th Impact/Drop – 1", 2" & 3" Thicknesses

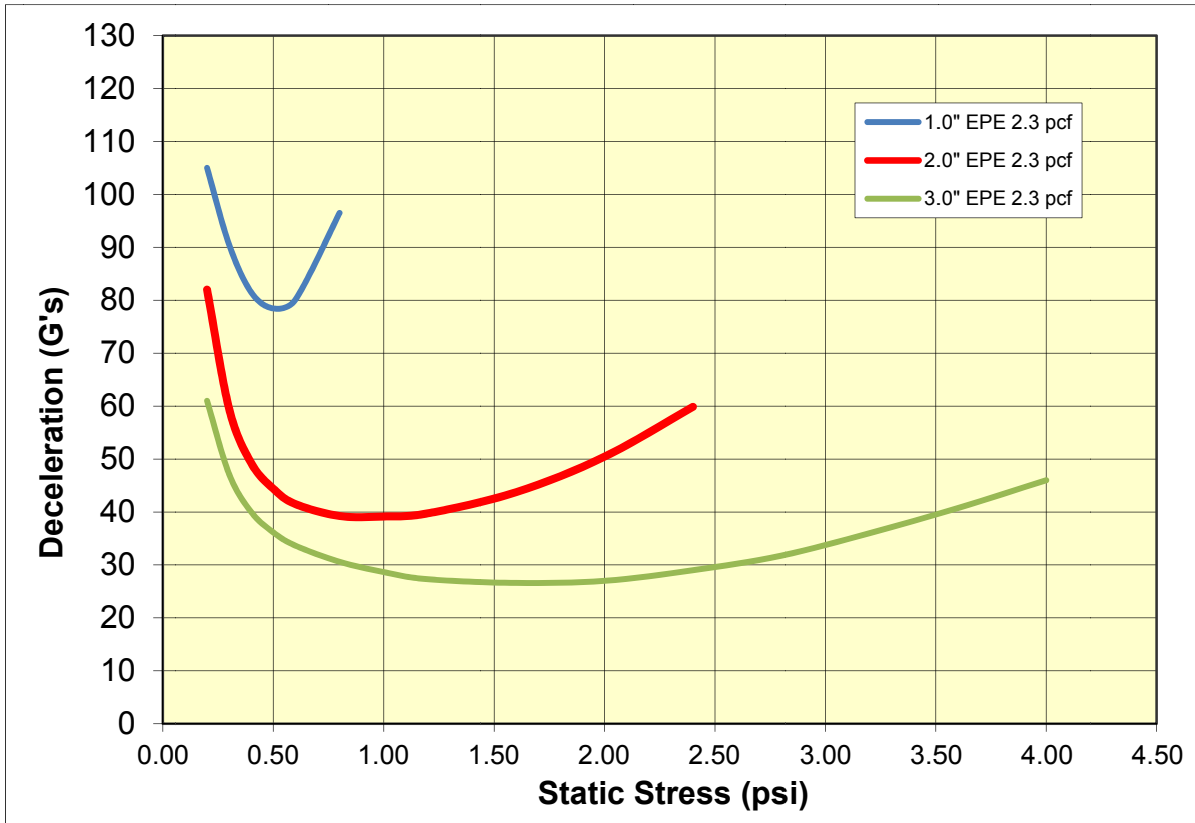

Note: 37 g/l = 2.3 pcf = 25X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)

Arplank EPE23 vs. #4.0 Extruded PE compared on a 24" Drop Impact, 2nd - 5th Drop, 2" and 3" thickness

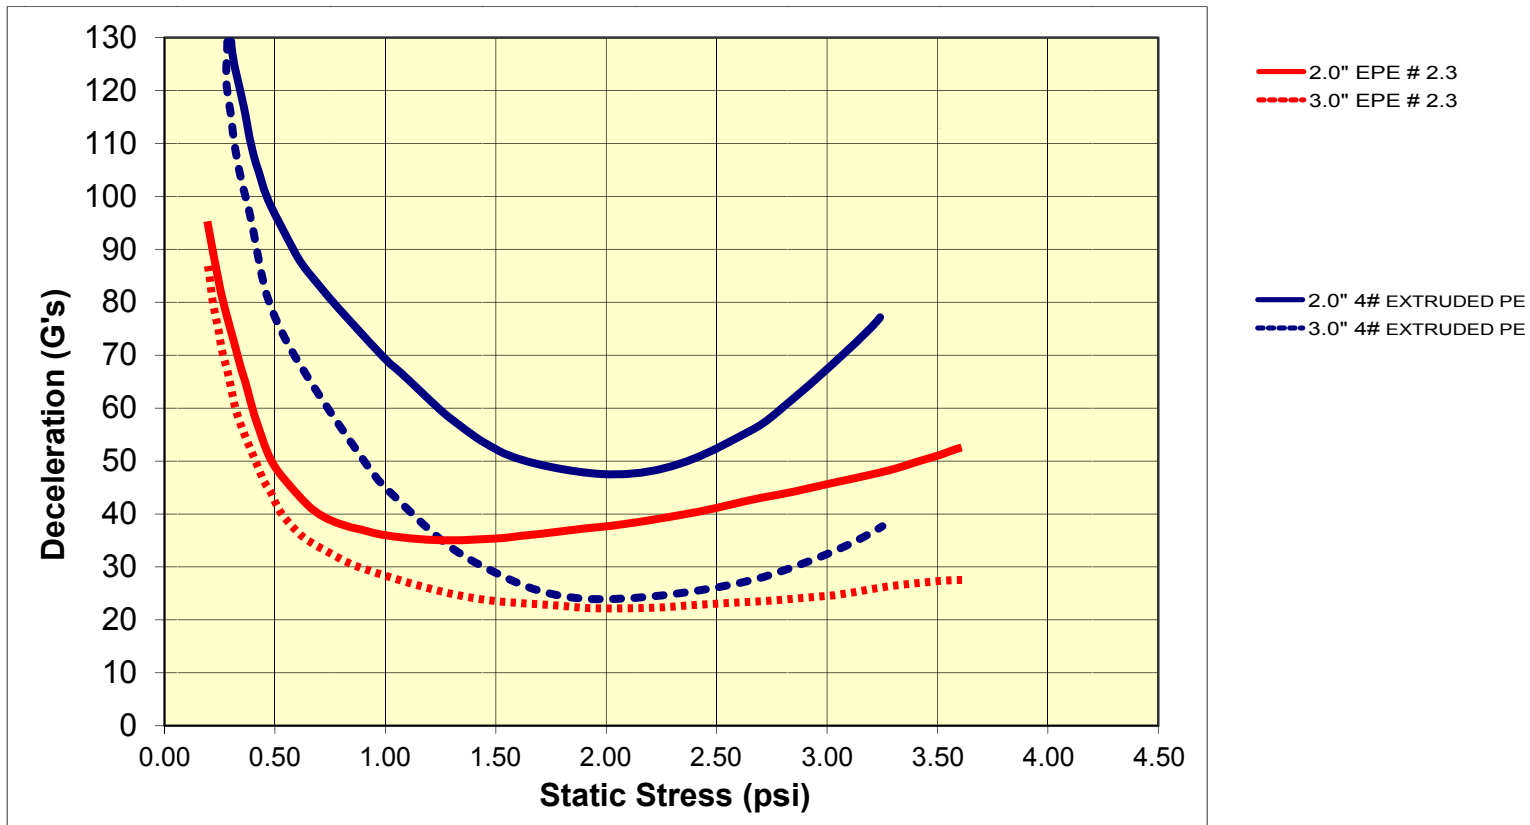

Note: 37 g/l = 2.3 pcf = 25X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)