




Cushioning Performance Curve for 37 g/l (2.3 pcf) ARPAK® Expanded Polyethylene (EPE) Foam 6 inch Drop, 1st Impact/Drop - 2" and 3" Thickness




Note: 37 g/l = 2.3 pcf (g/l = grams per liter; pcf = pounds per cubic foot)

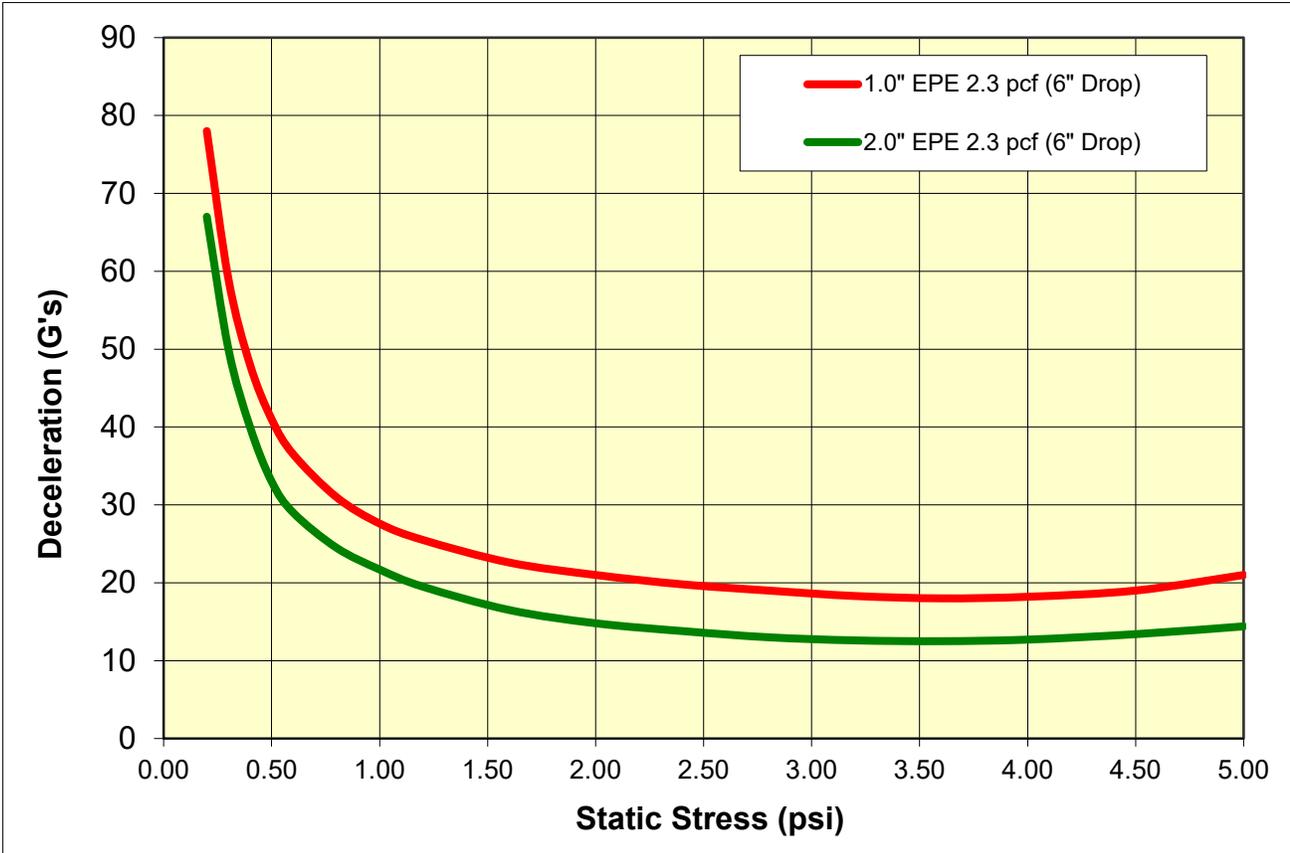



Cushioning Performance Curve for 37 g/l (2.3 pcf) ARPAK[®] Expanded Polyethylene (EPE) Foam 12-inch Drop, 1st Impact/Drop – 1" & 2" Thickness

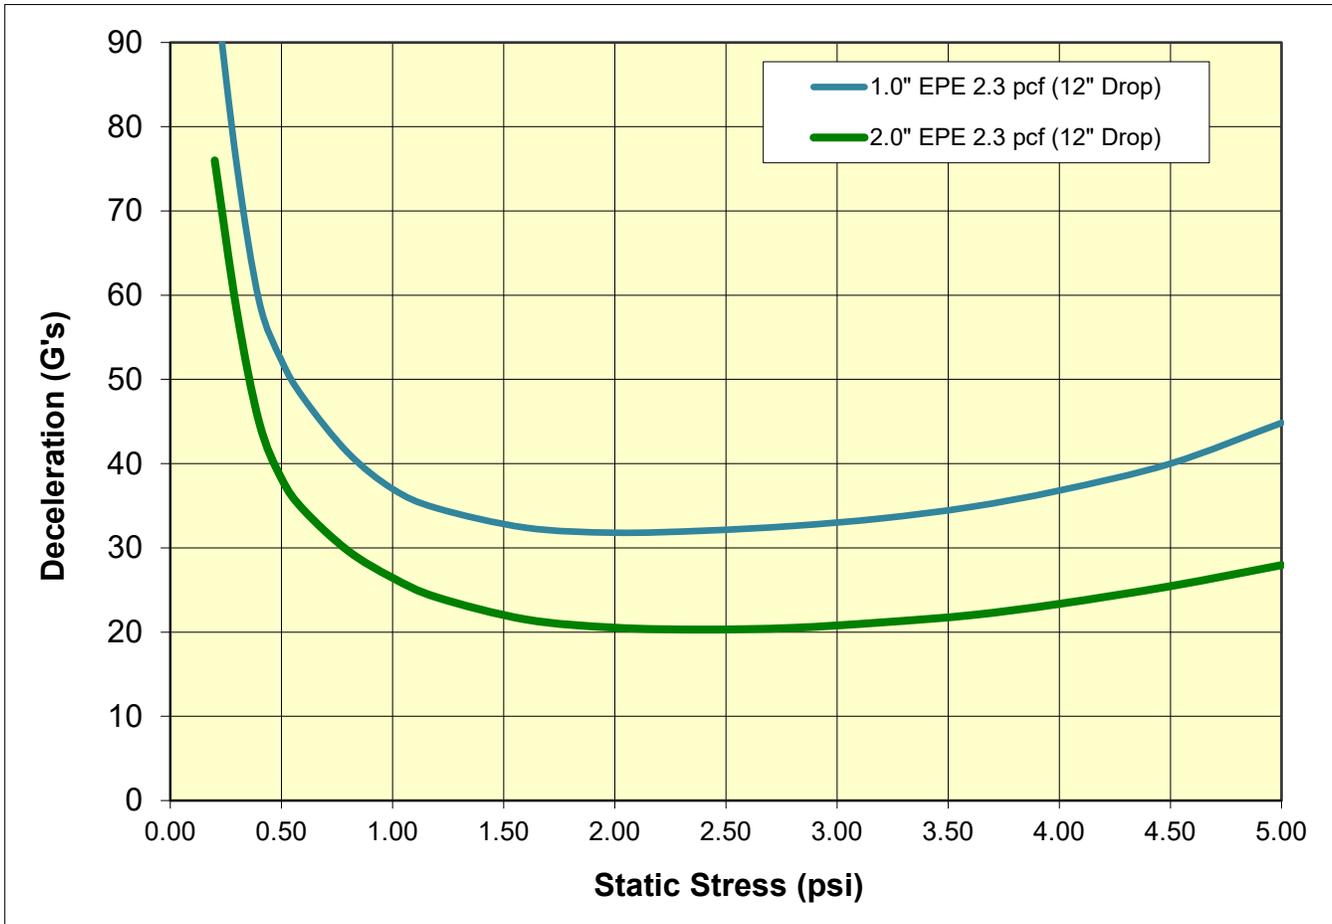


Note: 37 g/l = 2.3 pcf (g/l = grams per liter; pcf = pounds per cubic foot)
Tested per ASTM D3575 per ASTM D1596
Ambient Conditions 23°C ±2°C (73°F ±3.5°F) and 50% RH






Cushioning Performance Curve for 37 g/l (2.3 pcf) ARPAK[®] Expanded Polyethylene (EPE) Foam 18 inch Drop, 1st Impact/Drop - 2", 3" and 4" Thickness

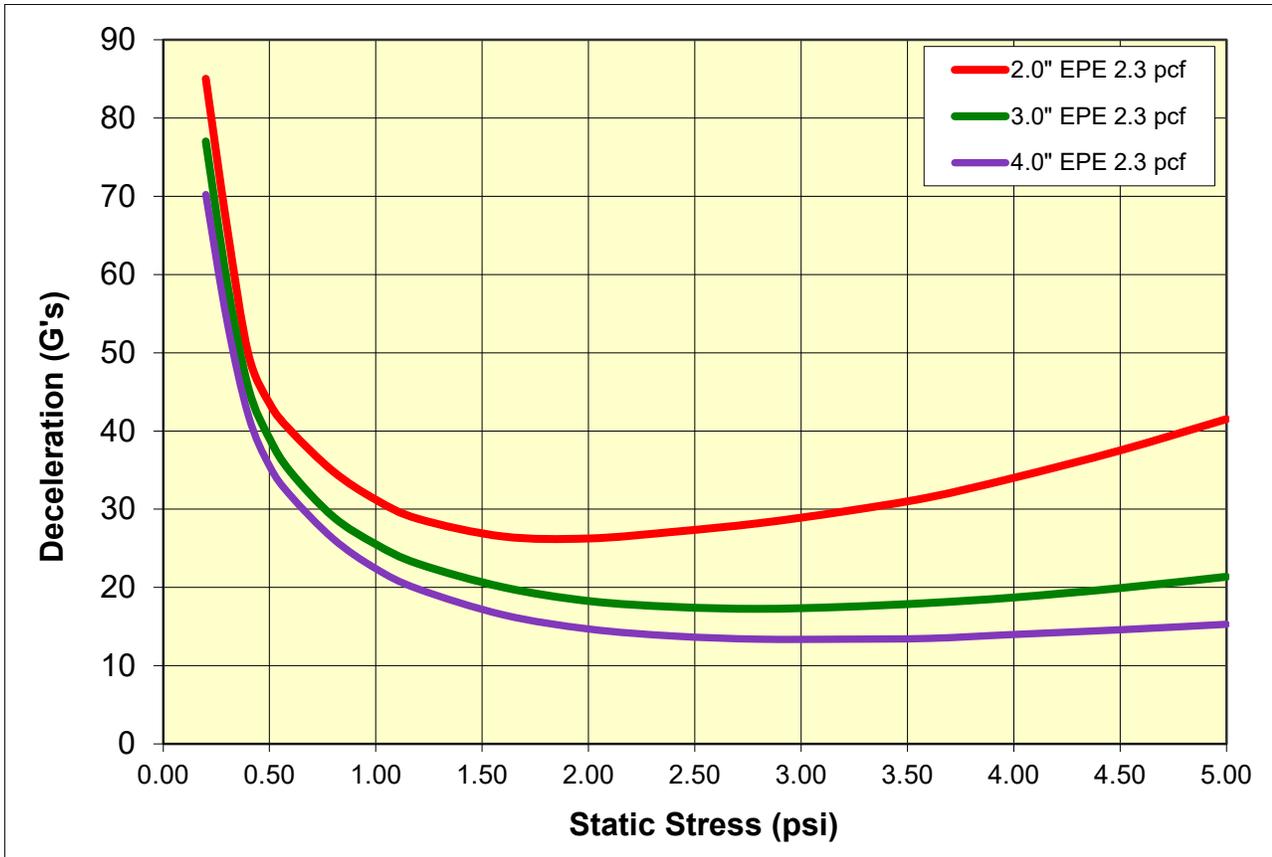

Note: 37 g/l = 2.3 pcf (g/l = grams per liter; pcf = pounds per cubic foot)



Cushioning Performance Curve for 37 g/l (2.3 pcf) ARPAK® EPE Foam 24 inch Drop, 1st Impact/Drop – 1", 2" & 3" Thicknesses

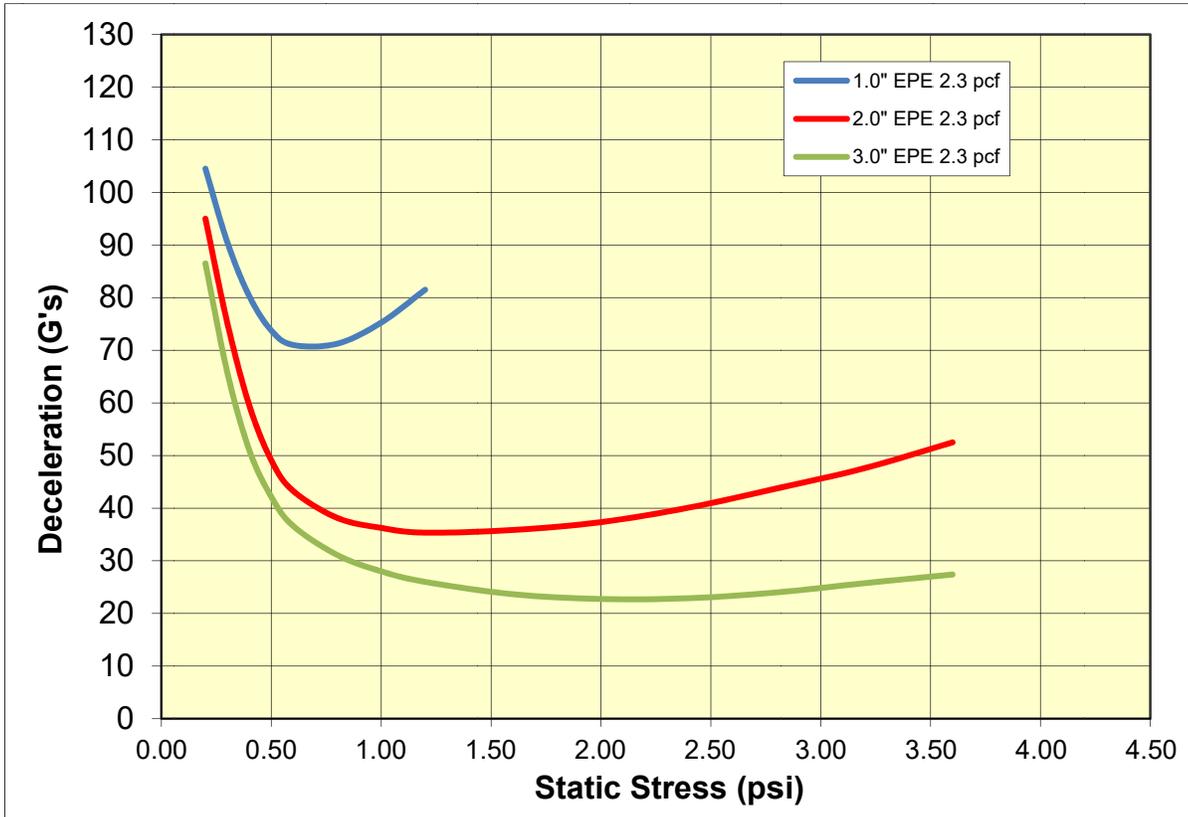

Note: 37 g/l = 2.3 pcf = 25X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)