





Cushioning Performance Curve for 45 g/l (2.8 pcf) ARPAK[®] Expanded Polyethylene (EPE) Foam 18 inch Drop, 2nd thru 5th Impact/Drop – 1", 2", 3" & 4" Thickness



Note: 45 g/l = 2.8 pcf (g/l = grams per liter; pcf = pounds per cubic foot)

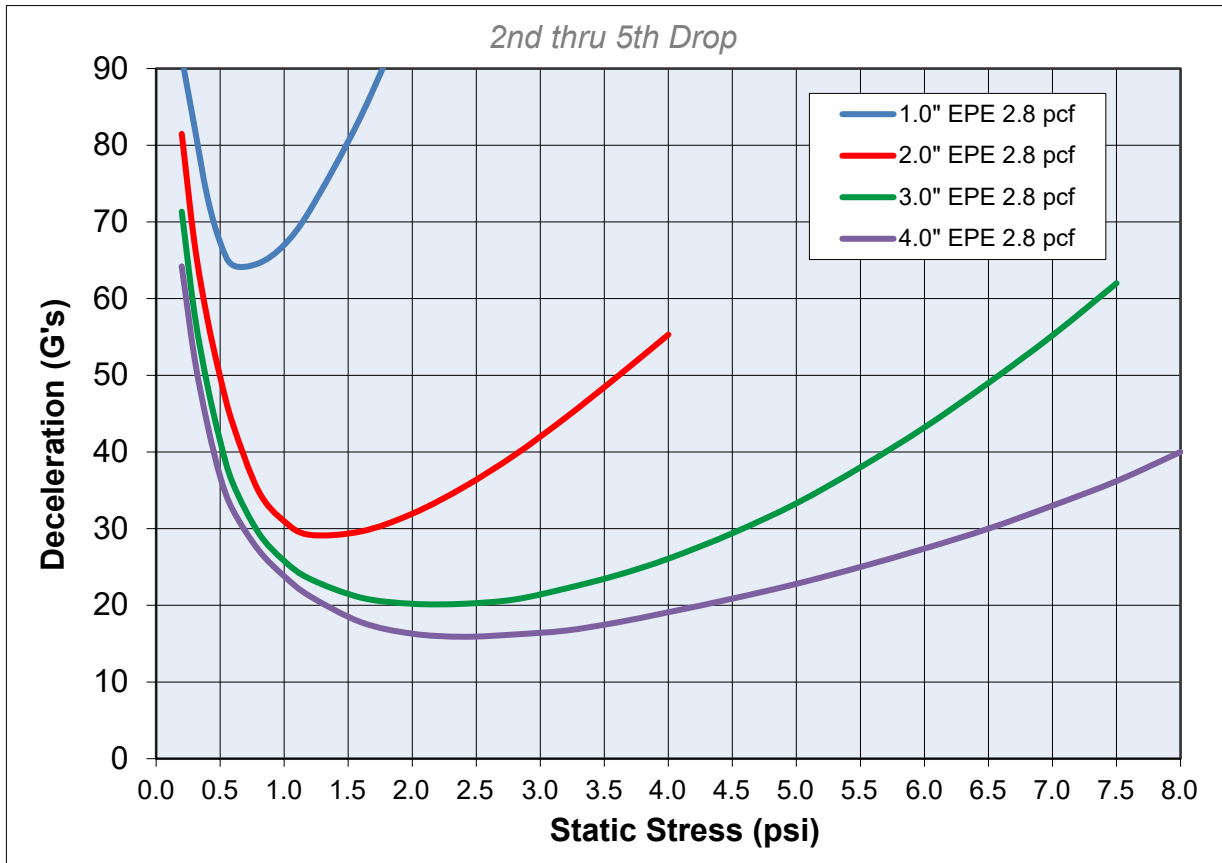


Cushioning Performance Curve for 45 g/l (2.8 pcf) ARPAK EPE Foam 24 inch Drop, 2nd thru 5th Impact/Drop - 1", 2" and 3" Thickness'

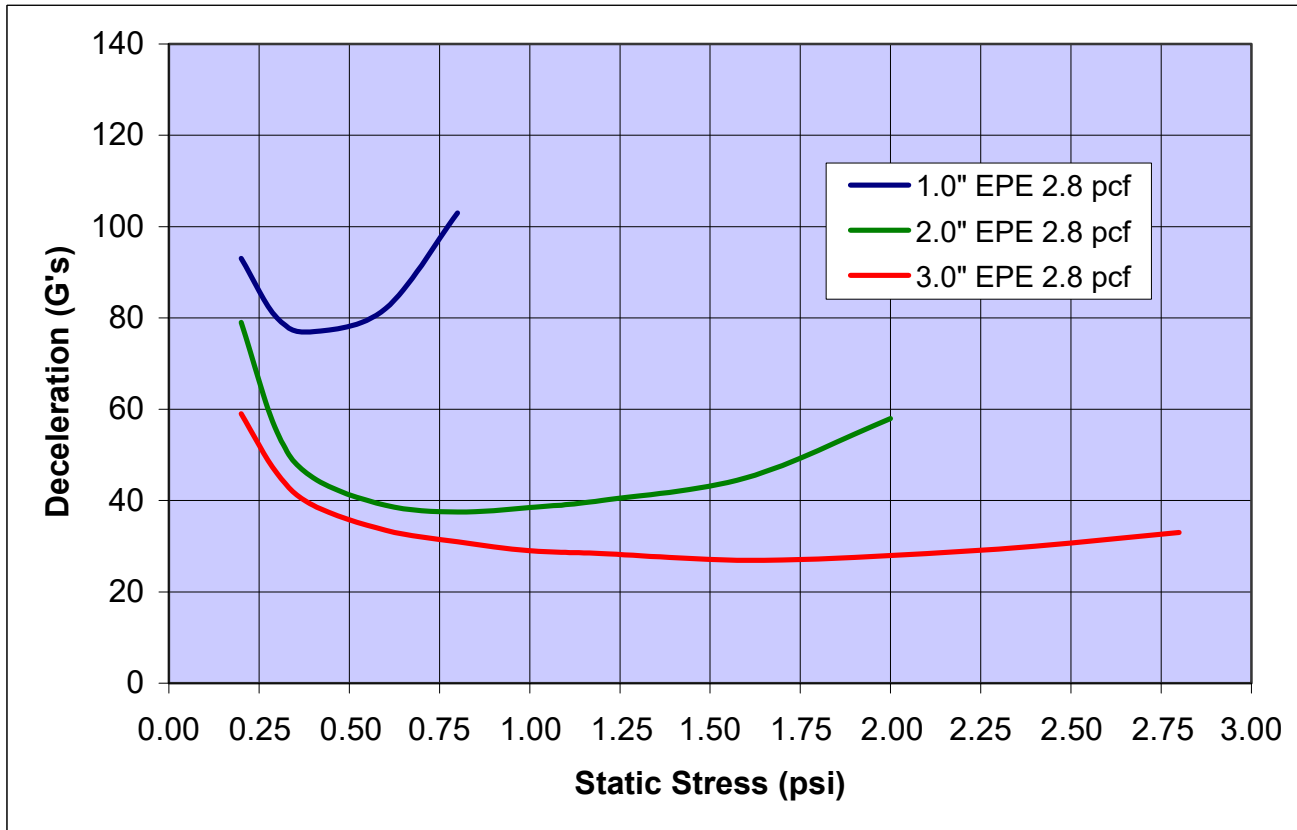


Note: 45 g/l = 2.8 pcf = 20X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)



Cushioning Performance Curve for 45 g/l (2.8 pcf) ARPAK[®] Expanded Polyethylene (EPE) 60 cm Drop, 1st & 2nd thru 5th Impact/Drop – 25, 50, & 75 mm Thicknesses

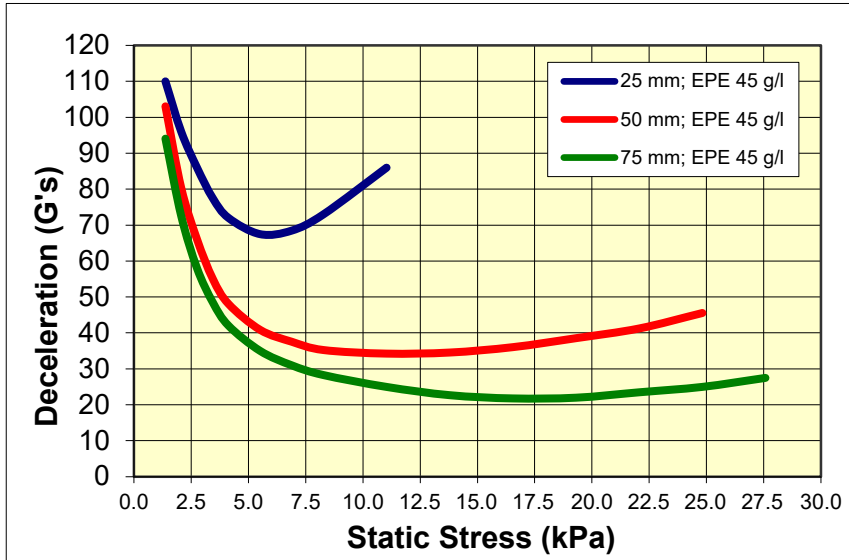

1st Drop

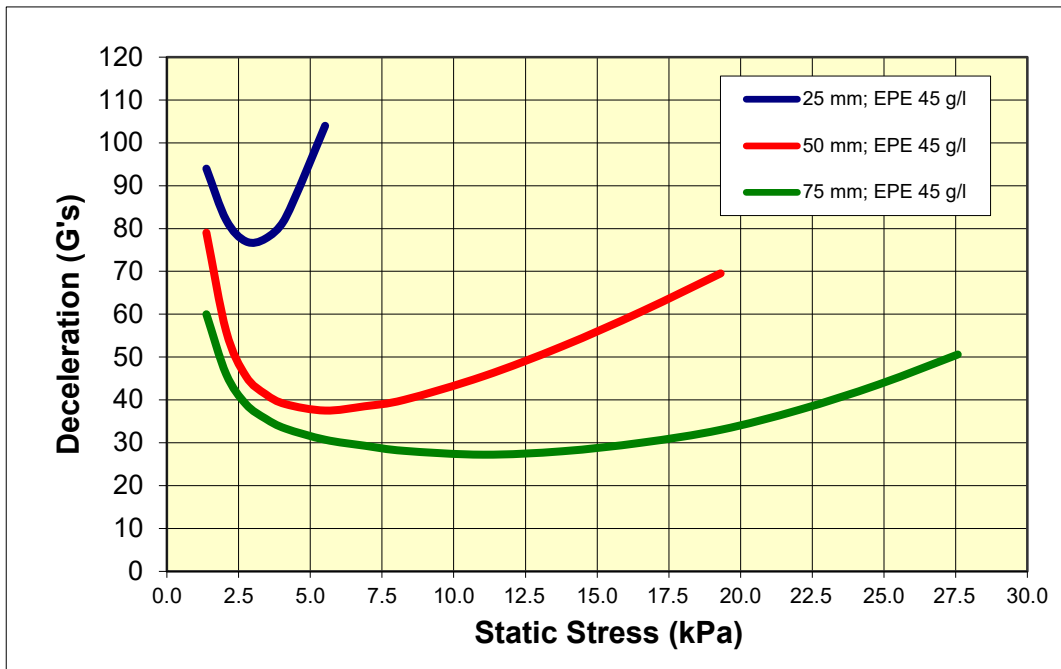

2nd thru 5th
Drops (Avg)

ARPLANK[®] Brand ARPPAK[®] Expanded Polyethylene Foam (EPE) is a highly resilient closed-cell expanded bead foam product. It is ideally suited as an energy absorbing cushioning material for products requiring shock absorption, vibration dampening, insulation, and chemical resistance. It withstands multiple impacts without damage, is very light-weight and is non-abrasive for Class A surfaces. It is also multi-directional in nature. Unlike traditional extruded foams, which yield different properties along the extrusion, vertical and horizontal axes, the properties of ARPAK[®] EPE are the same regardless of orientation. ARPAK[®] EPP contains no volatile blowing agents (0% LEL) and is non-corrosive. These properties make ARPAK[®] EPP an ideal and versatile product for protective packaging applications.

ARPAK is a registered trademark of JSP Licenses LLC. PUBLICATION JSP-techdoc-cushioncurve-EPE45g(2.8pcf)-60cm(24")-25-50-75mmThk-1st&2ndthru5th-2019/06

The information contained herein is based upon the results of limited laboratory tests on test samples of material molded from expanded polyolefin resin manufactured by JSP. There can be no assurance that the similar results will be achieved in simulated tests or actual use of commercial product molded by customers of JSP. Product performance may vary substantially depending upon the particular application or processing involved. The listed properties are illustrative only and not the product specifications. All suggestions and recommendations are made without warranty since the conditions of use are beyond JSP's control. Processing and applications of JSP foam products can influence molded part performance in many ways. Consequently, processors and/or users are advised that there may be a need to conduct independent tests and experiments in order for them to determine the extent to which they may choose to rely upon such information in their business operations. JSP disclaims any liability in connection with the use of the information and does not warrant against infringement by reasons of the use of its products in combination with other material or in any process.





Expanded bead foam packaging materials


Polyethylene

WWW.ARPLANKSALES.COM

Cushioning Performance Curve

for 2.8 pcf (45 g/l) ARPAK® EPE Foam

30 inch Drop, 2nd – 5th Impact/Drop - 1", 2" & 3" Thickness

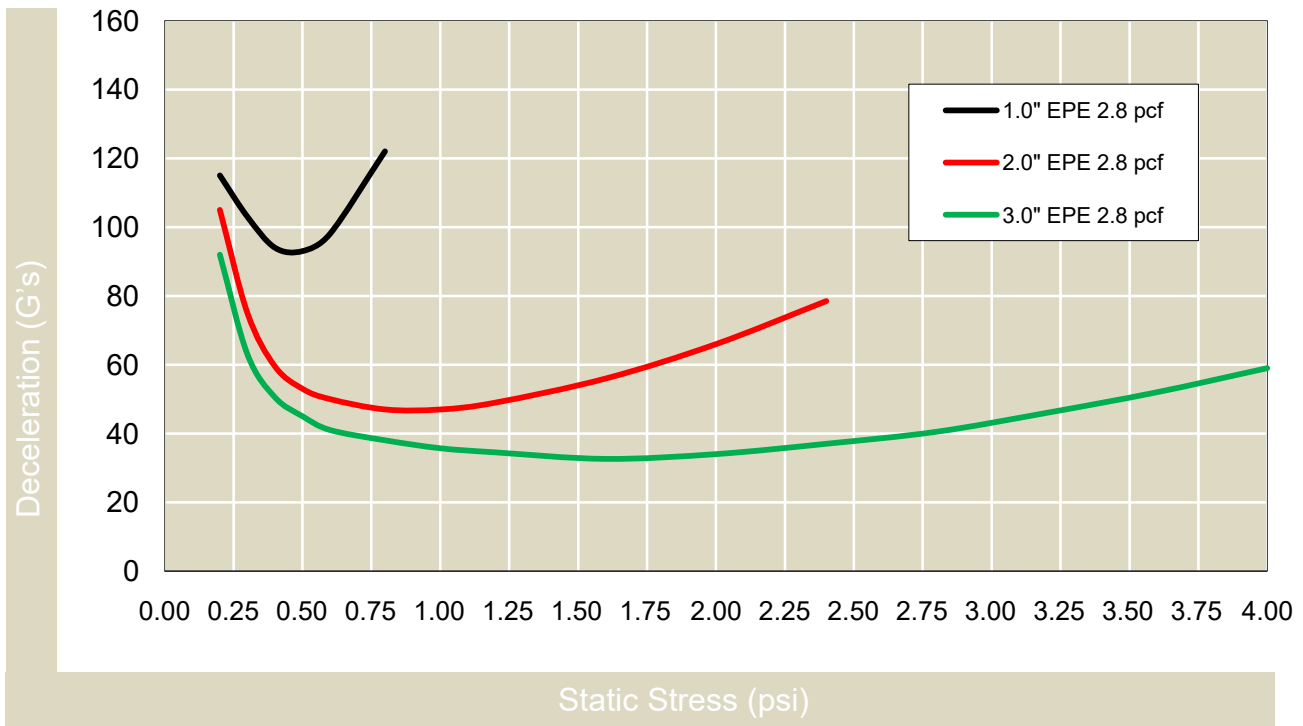

Note: 45 g/l = 2.8 pcf = 20X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)

ARPAK® is a registered trademark of JSP Licenses LLC.
PUBLICATION JSP-45g/l (2.8pcf)-ARPAK-EPE-cushioncurve-1,2,& 3inch-30" drop-2nd – 5th drop-2006/06

The above data reflects the performance of ARPLANK® panels under controlled test conditions using limited product samples. There can be no assurance that similar results will be achieved in simulated tests or actual commercial use of ARPLANK® panels. JSP makes no representation or warranty, and does not assume any liability, with respect to the accuracy or completeness of such information or the product performance in any particular instance. JSP makes no representation or warranty with respect to ARPLANK® panels, express or implied, including, without limitation, any warranty of merchantability, fitness for a particular purpose, quality or conformity with any description or sample.

MADE WITH
ARPAK®
Expanded Polyethylene (EPE) Bead Foam

JSP
www.jsp.com

INNOVATION
SIMPLIFIED®



Expanded bead foam packaging materials


Polyethylene

WWW.ARPLANKSALES.COM

Cushioning Performance Curve

for 2.8 pcf (45 g/l) ARPAK® EPE Foam

36 inch Drop, 2nd – 5th Impact/Drop - 1", 2" & 3" Thickness

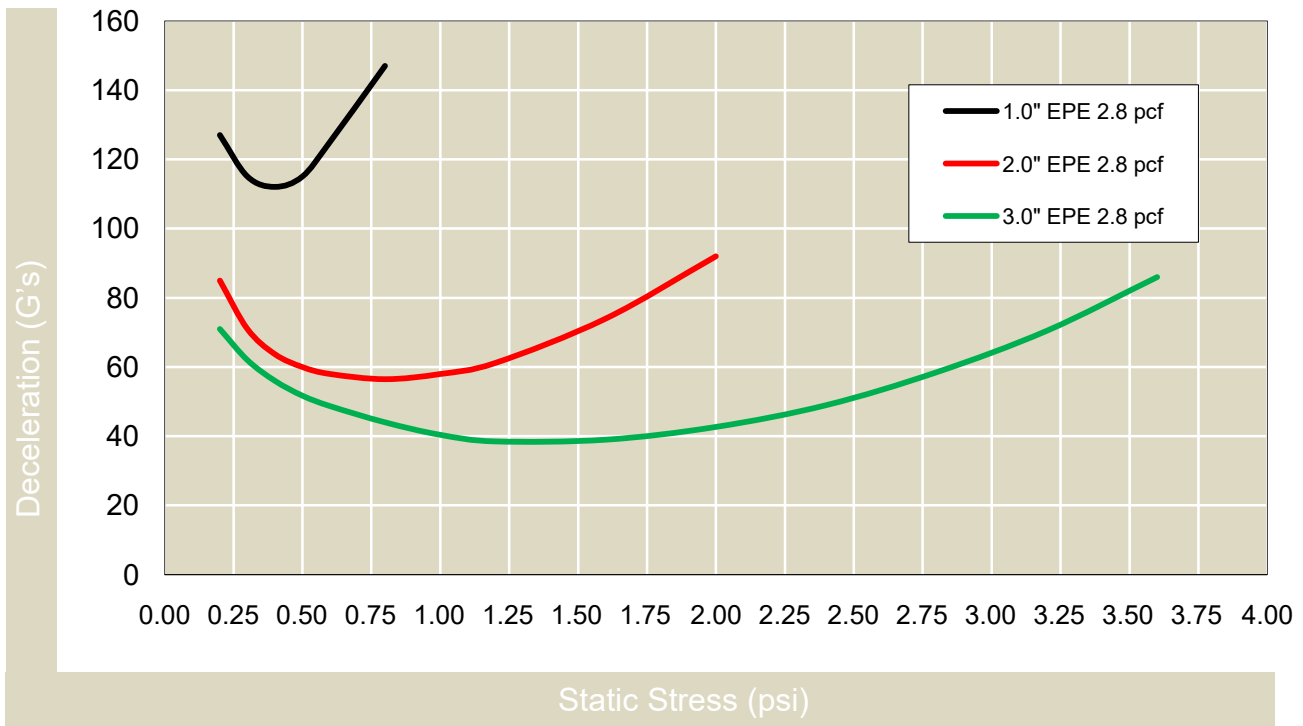

Note: 45 g/l = 2.8 pcf = 20X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)

ARPAK® is a registered trademark of JSP Licenses LLC.
PUBLICATION JSP-45g/l (2.8pcf)-ARPAK-EPE-cushioncurve-1,2,& 3inch-36" drop-2nd – 5th drop-2006/06

The above data reflects the performance of ARPLANK® panels under controlled test conditions using limited product samples. There can be no assurance that similar results will be achieved in simulated tests or actual commercial use of ARPLANK® panels. JSP makes no representation or warranty, and does not assume any liability, with respect to the accuracy or completeness of such information or the product performance in any particular instance. JSP makes no representation or warranty with respect to ARPLANK® panels, express or implied, including, without limitation, any warranty of merchantability, fitness for a particular purpose, quality or conformity with any description or sample.

MADE WITH
ARPAK®
Expanded Polyethylene (EPE) Bead Foam

JSP
www.jsp.com

INNOVATION
SIMPLIFIED®



Expanded bead foam packaging materials


Polyethylene

WWW.ARPLANKSALES.COM

Cushioning Performance Curve

for 2.8 pcf (45 g/l) ARPAK® EPE Foam

42 inch Drop, 2nd – 5th Impact/Drop - 1", 2" & 3" Thickness

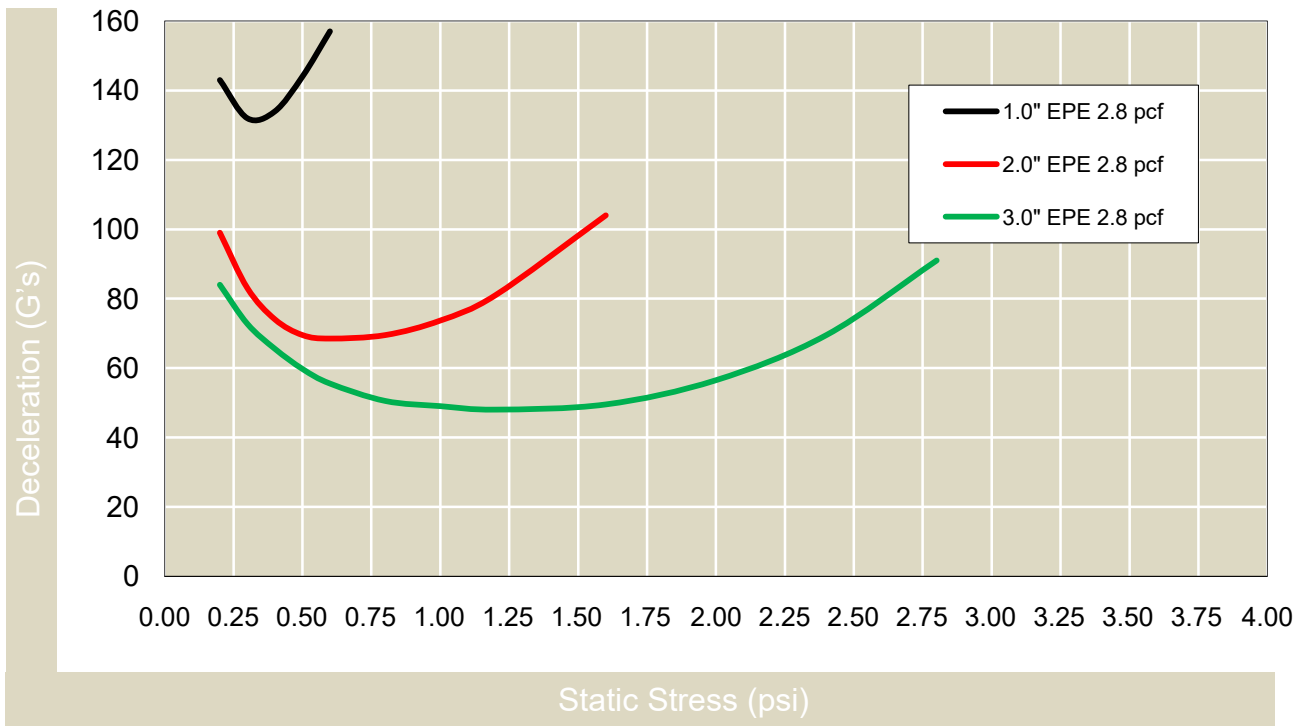

Note: 45 g/l = 2.8 pcf = 20X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)

ARPAK® is a registered trademark of JSP Licenses LLC.
PUBLICATION JSP-45g/l (2.8pcf)-ARPAK-EPE-cushioncurve-1,2,& 3inch-42" drop-2nd – 5th drop-2006/06

The above data reflects the performance of ARPLANK® panels under controlled test conditions using limited product samples. There can be no assurance that similar results will be achieved in simulated tests or actual commercial use of ARPLANK® panels. JSP makes no representation or warranty, and does not assume any liability, with respect to the accuracy or completeness of such information or the product performance in any particular instance. JSP makes no representation or warranty with respect to ARPLANK® panels, express or implied, including, without limitation, any warranty of merchantability, fitness for a particular purpose, quality or conformity with any description or sample.

MADE WITH
ARPAK®
Expanded Polyethylene (EPE) Bead Foam

JSP
www.jsp.com

INNOVATION
SIMPLIFIED®